



第七版
Seventh Edition

标准产品选型手册

Standard Production Selection Manual



上海兴源东安电气有限公司 (总部)
Shanghai Xingyuan Dongan Electric Co., Ltd.
上海市青浦区嘉乐东路818号 绿地海外滩金融A座1701室
Room 1701, Building A, Bund Square No 818, East Longhua Road, Hongqiao District, Shanghai

DONGAN 上海生产制造中心 Plant Shanghai

上海兴源东安电气设备有限公司
Shanghai Xingyuan Dongan Electric Equipment Manufacture Co., Ltd.
上海市金山区朱泾镇中旺路168号 Tel: 021-67220000 Fax: 021-57317888
No 168 Zhongwang Rd, Zhujing Town, Jintan District, Shanghai

DONGAN 扬州生产制造中心 Plant Yangzhou

扬州东安电气有限公司
Yangzhou Dongan Electric Co., Ltd.
扬州市江阳街道金源中路18号 Tel: 0514-80981888 Fax: 0514-80981335
No 18, Chongyuan Mid Rd, Wuyang Economic Development Zone, Yangzhou

Introduction



公司简介 INTRODUCTION



东安电气作为中国工业机箱机柜民族品牌的龙头企业，诞生于九十年代后期，公司成立之初就确立“做中国性价比最高的机箱机柜制造商”的目标。近三十年来，东安人秉承追求卓越品质、控制成本、客户价值第一的企业理念，持续耕耘，在市场上赢得了广大客户的高度认可，东安客户大部分都是国内外一流企业，价值主张趋同，多年来东安电气与客户共同成长，产品覆盖石油化工、冶金、电力自动化、汽车制造、新能源、机械制造、轨道交通、港口设备、船舶等众多领域，行业内口碑皆碑，品牌美誉度逐年上升，成为中国国内工业机箱机柜最有竞争力的厂商之一。

近年来，东安研究市场，探讨客户需求，致力解决客户痛点、难点，提出标准化大规模柔性定制概念，通过数字化软件技术甚至把客户的交付延申到电气全成套交付，并建设了具有国际领先水平的机箱机柜“超级工厂”，把产品制造水平提升到与全球领先品牌相媲美的高度，定制交付速度提升二倍，生产效率比传统定制提高三倍，而成本有效降低。新的运营方式面世后，解决了广大客户电控柜集成制造低效、品质不稳、成本持续增加等困扰问题，开创了工业电柜、集成制造的新篇章！

目前，东安电气旗下有二个独资工厂，一家控股工厂，总占地逾300亩，建筑面积15万平方千米，拥有钢板开平分条加工中心，25条各种型材辊轧线，30余台套数控冲、折弯设备，近20台激光加工设备，5条全自动喷涂线，1条电泳线，以及其他各类钣金加工设备一批，成为中国最大的工业机箱机柜加工工厂。

东安电气近千名员工充满激情和信心为工业自动化行业的中外客户，提供最优质和最合理价格的机箱机柜及电气集成制造，助力他们提升价值，从而成为最有力的行业竞争者！

东安电气的使命：成就客户，成就自己！

As a leading enterprise of China's national brand of industrial chassis and cabinets, Dongan Electric was founded in the late 1990s, and the company established the goal of "China's Best Value Chassis & Rack Manufacturer" at the inception of the company. In the past 30 years, Dongan company adheres to the pursuit of company philosophy of excellent quality, cost control, customer value first, continuously works hard and earns strong market acceptance among customers. Most of Dongan customers are first-class enterprises at home and abroad with similar value proposition. For many years, Dongan Electric has been developing alongside its clients. The company's products involve many fields such as petrochemical, metallurgy, power automation, automobile manufacturing, new energy, machinery manufacturing, rail transport, port equipment, and ships. The company becomes one of the most competitive manufacturers of industrial chassis and cabinets in China as an industry benchmark with consistently enhancing brand prestige.

In recent years, Dongan has conducted market research, explored customer needs, and strived to address their pain points and challenges, proposing the concept of standardized large-scale flexible customization, especially extends the customer's delivery to the full electrical turnkey delivery through digital software technology, and builds a "super factory" for chassis and cabinets that leads the world in technology, improving the product manufacturing standard to a level comparable with globally leading brands, doubling the customized delivery speed, and increasing three times higher production efficiency than traditional customization but effectively reducing the cost. After the launch of the new operation model, it solves the prevalent industry issues faced by customers in inefficient integrated manufacturing, unstable quality and continuous increase in cost of electric control cabinet, and ushers in a new phase for industrial electrical cabinets and integrated manufacturing technology!

Currently, Dongan Electric has two wholly-owned factories and one majority-held factory, covers a total area of nearly 300 acres and a construction area of 150,000 square meters. The company has a steel plate leveling and slitting processing center, 25 various material rolling lines, nearly 30 sets of CNC punching and bending equipment, nearly 20 laser processing machines, 5 automatic coating lines, 1 electrophoretic coating line, and other various sheet metal processing equipment. The company becomes China's largest industrial chassis and cabinet processing factory.

With passion and confidence, Dongan Electric's nearly 1,000 employees are dedicated to providing the highest-quality chassis and cabinets and electrical integration manufacturing for global clients in the industrial automation to empower our customers to enhance their value and become the strongest competitors in their industries!

Dongan Electric's Mission: Succeed Together with Clients!

[公司文化]

Corporate Culture

努力实现
live to make

“百年东安”的美好梦想！
the dream of "Dong An of A Hundred Years" come true



东安核心价值观

诚信务实

信守承诺，信用的生意经，拒绝不正当（贿赂、回扣、偷工减料等）交易的订单；兢兢业业，忠诚守拙，脚踏实地，一步一个脚印做事做人；反对浮夸、空谈、实干敬业。

勤奋创新

弘扬吃苦耐劳的创业精神，永远保持奋力拼搏的工作面貌；建设包容、开放、学习、激情活力的企业文化；鼓励“出头鸟”，将类似于“头脑风暴”的集思广益活动变成公司各部门的工作常态，形成人人关注本职工作持续改善和创新的企业风尚。

客户导向

认同为客户创造价值是我们存在的唯一理由；客户的需求将是我们努力的方向。同时我们还会利用我们行业专家的眼光帮助客户发现价值，从而为客户获得更多的企业竞争力。

合作共赢

客户、供应商、员工、企业之间建立平等、尊重的伙伴关系；公司内部提倡员工之间团结、互敬、坦诚、善听、协作、和谐，倡导一人有难大家帮的企业风气，反对谎言、拆台、小报售的阴暗文化；通过努力创造价值，客户、供应商、员工、企业、社会分享其带来的财富效应和社会效应。

东安精神理念

于务实中求生存/于创新中求进步/于勤奋中求发展

东安发展愿景

最高性价比的电气控制机箱、机柜制造商

具备世界级水平的电气自动化系统集成商

成为最有价值的电气自动化控制产品供应商之一

Explanation for the New Core Values of Dong An

Honest and Pragmatic

We believe in honest and credit businesses, refusing illegal trade orders (bribe, kickback, and jerry-building, etc.); we keep cautious and non-scientious, faithful and down-to-earth attitude to do practical businesses, and fight against turgidity or phrasemongering.

Diligent and Innovative

We carry forward the diligent and hardworking incubation spirits and maintain working enthusiasm; we establish the enterprise culture of inclusiveness, openness, further study, passion and enthusiasm. We encourage "pioneers", and turn the "brain storm" activities, which is helpful for collecting thoughts, to be common activity of all departments of the company, thus to form a kind of enterprise spirits that all staff focus on the continuous improvement and innovation of their own work.

Customer Oriented

It considers that "creating value for customers" is the unique reason for our existence. We take customers' demands as our direction of development. Moreover, we help the customers find values with our expertise views thus to enable the customers to be more competitive.

Cooperation and Win-win

Establish equal and respect partnership among customers, suppliers, employees, and enterprises; advocate for unity, mutual-respect, being good at listening to others, being collaborative and harmonic among internal employees of the company, while fighting against gossip, rattling

Spiritual Concepts of Dong An

Surviving by being pragmatic;

Making progress by being innovative;

Developing by being diligent

Vision of Dong An

To be the manufacturer of electric control box and cabinet with the highest cost performance;

To be the integrator of electric automation system with world-class level;

To be one of the most valuable suppliers of electric automation control products.





生产基地：上海兴源东安电气设备制造有限公司
定位：标准化、规模化生产
Production base—
Shanghai Xingyuan DongAn Electric Co., Ltd
Orientation:
standardization and large-scale

2011年投产，总投资1.7亿元，一期机箱机柜项目建筑面积17000平方米，适合机箱机柜的标准化、规模化生产，拥有国内机箱行业内的第一条“钢卷分条开平线”、瑞士金马自动喷涂和大型的机箱机柜标准化加工设备。

With the total investment of 170 million Yuan, the production was commenced in 2011. The construction area for box/cabinet production is 17000 square meters. It is designed for standardization and large-scale production and has the first "steel coil splitting cutting line", Maquan Automatic Paint Spray from Switzerland and the large-scale processing equipment suitable for the standardization production of box/cabinet.



生产基地：扬州东安电气有限公司
定位：标准化、个性化定制
Production base—
Yangzhou DongAn Electric Co., Ltd
Orientation:
standardization and customization

总建筑面积15000平方米，是集机箱机柜制造、电气系统集成于一体的生产制造中心拥有国内机箱行业内的第一条“九折型材冷弯辊轧线”、“M5箱体辊轧线”、“门加强方管热镀锌轧线”和九折型材框架专用焊接夹具等专用设备。

With the total construction area of 15000 square meters, the company is a production and manufacture center with integration of box/cabinet production and electrical system. The company is the first one in the industry of machine cabinet in China to adopt "nine-folder profile material rolling line", y5 cabinet rolling line, "door reinforcing square tube hot-dip coating and rolling line" and welding clamp special for nine-folder profile material cabinet frame welding clamps.



生产基地：安徽火山湖智能装备有限公司
定位：标准化、规模化生产
Production Base—
Anhui Huoshanhu Intelligent Equipment Co., Ltd
Orientation:
Standardized and large-scale

2022年投建的安徽超级工厂位于安徽泾县智能装备制造产业园，一期占地202亩，为目前国内最大的工业自动化电气控制柜及系统集成智能制造基地。变传统“混件流”为标准化“单件流”生产方式。

The Anhui Super Factory, which will be built in 2022, is located in the Intelligent Equipment Manufacturing Industrial Park in Jing County, Anhui. The first phase covers an area of 202 acres. It is currently the largest industrial automation electrical control cabinet and system integration intelligent manufacturing base in China. Replace the traditional "mixed flow" production method with a standardized "one piece flow" production method.

CONTENT

目录

箱体系列 Box series

Page页码

接线箱DK系列	Junction Box DK Series	P3-6
小型控制箱CB系列	Small Control Box CB Series	P7-8
紧凑型控制箱MB系列	Compact Control Box MB Series	P9-12
紧凑型控制箱ME系列	Compact Control Box ME Series	P13-14
悬挂箱DC系列	Cantilever Box DC Series	P15-16
独立式控制箱MS系列	Detached Control Cabinet MS Series	P17-19
并联柜系统DS系列	Combined-Cabinet System DS Series	P20-22
VS 十六折框架式通用控制柜	VS Sixteen Fold Frame Type Universal Control Cabinet	P23-38
MIX 十五折模组机柜	MIX Fifteen Fold Modular Cabinet	P39-61
DQ箱体	DQ box	P62-65

不锈钢系列 Stainless Steel

Page页码

不锈钢DK系列	Stainless Steel DK Series	P66-69
不锈钢CB系列	Stainless Steel CB Series	P70-71
不锈钢MB系列	Stainless Steel MB Series	P72-75
不锈钢ME系列	Stainless Steel ME Series	P76-77
不锈钢MS系列	Stainless Steel MS Series	P78-79
不锈钢DS系列	Stainless Steel DS Series	P80-81

附件系列 Accessory Series

P82-91


资质证书

P92-101

IP防护等级	IP protection grade	P102
--------	---------------------	------

DONGAN

接线箱DK Junction box KL

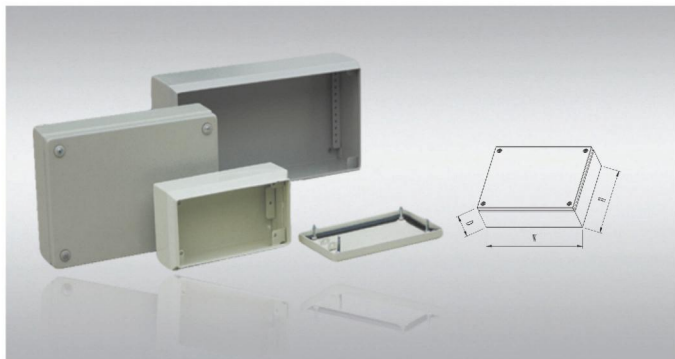

材料：

箱体：钢板，1.2mm。
盖板：钢板，1.2mm
宽度或高度尺寸≥500mm 材料厚为1.5mm

表面处理：

箱体和盒盖：
磷化，喷涂粉末涂层
颜色 RAL7035 或者 RAL7032 橘纹

防护等级：

防护等级 Ip54

标准配置：

箱体，盒盖四周带聚氨酯泡
沫塑料密封圈以及包含塑料
套管的箱盖螺钉，壁挂孔孔塞 壁挂件

Material:

Box: steel 1.2mm
Cover Plate: steel 1.2mm
When width or height ≥ 500mm, steel is 1.5mm

Surface Treatment:

Box & Cover:
Phosphating, Spraying Powder Coating,
Color RAL7035 or RAL7032 with orange peel

Protection:

Ip54

Standard Configuration:

Box & Cover with polyester foam
and cover screw with plastic sleeve,
hanging hole plug, hanging piece

接线箱DK Junction box KL



- ① 盖板用螺钉固定,可以迅速打开及可靠关闭.箱体折边设计简洁,提供更大的安装空间
- ② 底部支架为螺纹孔,能够在上下表面安装导轨,使箱体深度得到更好的使用
- ③ 底部可根据客户要求定制安装板,提供更灵活的安装空间
- ④ Cover Plate is fixed by thread screw for rapid open & reliable close. Simple design edgefold provides more installation space.
- ⑤ The bottom support has threaded hole, which could install slide way on top & bottom plate surface. It makes box depth get better use.
- ⑥ It could be custom made mounting plate on the bottom according to client demand. Provide more flexible installation space.

上下无封板深度80mm No plate on top & bottom. Depth 80mm.

宽度 (Width) mm	数量 Quantity	150	200	200	300	300	400	600	页码 (Page)
高度 (Height) mm		150	150	200	150	200	200	200	
深度 (Depth) mm		80	80	80	80	80	80	80	
型号 (Model) DK	1个	1310.118	1310.218	1310.228	1310.318	1310.328	1310.428	1310.628	

标配附件 Standardized Accessory

孔塞 Hole Plug	4个	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800
壁挂件 Hanging Piece	4个	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801

定制附件 Custom Made Accessory

安装板 Mounting Plate	1个	1340.118	1340.218	1340.228	1340.218	1340.328	1340.428	1340.628
导轨 Sky Way 35/7.5	1个	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000
导轨 Sky Way 35/15	1个	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000

外形尺寸可以按照要求定制,标准配置不变.颜色有特殊要求及需要定制附件时在合同中注明.

Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.



宽度 (Width) mm	数量	150	200	200	300	300	400	600	页码
高度 (Height) mm		150	150	200	150	200	200	300	
深度 (Depth) mm		120	120	120	120	120	120	120	
型号(Model) DK	1 个	1310.11	1310.210	1310.221	1310.311	1310.321	1310.421	1310.431	


[illegible][illegible]

厚度 (Width) mm	数量	500	500	600	600	600	800	800	页码
厚度 (Height) mm		200	300	200	300	400	200	400	
深度 (Depth) mm		120	120	120	120	120	120	120	
厚度 (Model) Dk	1个	1310.521	1310.531	1310.621	1310.631	1310.641	1310.821	1310.841	

[illegible][illegible]

Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

箱体深度

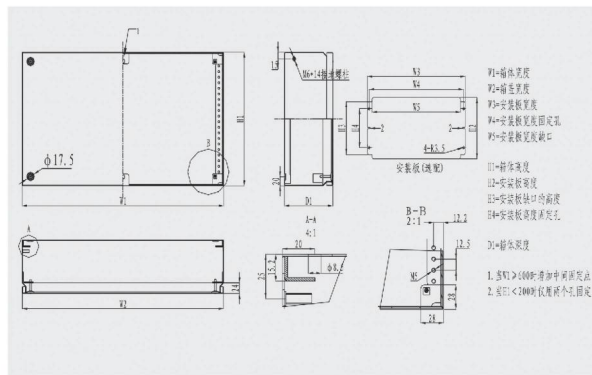

ID#	寬度尺寸					高度尺寸				深度
	#1	#2	#3	#4	#5	#1	#2	#3	#4	
150*150*80	150	149	135	116	103	150	125	123		80
200*150*80	200	199	185	166	153	150	125	123		80
200*200*80	200	199	185	166	153	200	175	173	75	80
300*150*80	300	299	285	266	253	150	125	123		80
300*200*80	300	299	285	266	253	200	175	173	75	80
400*200*80	400	399	385	366	353	200	175	173	75	80
500*200*80	500	499	485	466	453	200	175	173	75	80
600*200*80	600	599	585	566	553	200	175	173	75	80
800*200*80	800	799	785	766	753	200	175	173	75	80
1000*200*80	1000	999	985	966	953	200	175	173	75	80
150*150*120	150	149	135	116	103	150	125	123		120
200*150*120	200	199	185	166	153	150	125	123		120
200*200*120	200	199	185	166	153	150	125	123		120
300*200*120	300	299	285	266	253	200	175	173	75	120
400*200*120	400	399	385	366	353	200	175	173	75	120
500*200*120	500	499	485	466	453	200	175	173	75	120
600*200*120	600	599	585	566	553	200	175	173	75	120
800*200*120	800	799	785	766	753	200	175	173	75	120
1000*200*120	1000	999	985	966	953	200	175	173	75	120
150*150*160	150	149	135	116	103	150	125	123		160
200*150*160	200	199	185	166	153	150	125	123		160
200*200*160	200	199	185	166	153	200	175	173	75	160
300*200*160	300	299	285	266	253	200	175	173	75	160
400*200*160	400	399	385	366	353	200	175	173	75	160
500*200*160	500	499	485	466	453	200	175	173	75	160
600*200*160	600	599	585	566	553	200	175	173	75	160
800*200*160	800	799	785	766	753	200	175	173	75	160
1000*200*160	1000	999	985	966	953	200	175	173	75	160



小型控制箱 CB Small Control Box CB



产品特点 Features

- 1.更加精巧的180铰链可以使开门角度最大化,更加便于操作。
- 2.在高度低于250mm的情况下仍然可以使用两个铰链,使门板更加稳固
- 3.独特的防水边设计以及胶条处理可以使防护等级最高达到IP66
- 4.提供安装板保证最大化的安装空间

1. More elaborate 180 hinge makes open angle maximum, and makes operation more convenient.
2. Two hinges are still available to use under 250mm height; it makes front plate more stable.
3. Unique waterproof edgfold & sealing rubber strip make protection level to IP66.
4. Provide mounting plate to maximize installation space.

材料:

箱体:钢板,1.2mm.
门板:钢板,1.5mm
宽度或高度尺寸 ≥ 500 mm时门板1.5mm,箱体2.0

表面处理:

箱体和门板:磷化,喷涂粉末涂层 颜色RAL7035
或者RAL7032 橘纹
安装板:镀锌板,2.5mm.

防护等级:

IP54

标准配置:

箱体,单门,四周带聚氨酯泡沫塑料密封圈,
1把小方锁固定在门板左侧,镀锌安装板,
背板,挂孔配孔塞,挂挂件

Material:

Box: steel 1.2mm
Cover Plate: steel 1.2mm
When width or height ≥ 500 mm, steel is 1.5mm,
Box is 2.0mm

Surface Treatment:

Box & Cover: Phosphating, Spraying Powder Coating,
Color RAL7035 or RAL7032 with orange peel
Mounting Plate: galvanized plate 2.5mm

Protection:

Ip54

Standard Configuration:

Box & single door with polyester foam plastic seal,
one lock on the left of door, galvanized mounting plate
rear plate, hanging hole plug, hanging piece.

宽度 Width mm	150	200	150	200	200	300	500	页码
高度 Height mm	150	200	300	300	400	400	500	
深度 Depth mm	80	80	80	80	80	80	80	
安装板 Mounting Plate	1 个							
型号 CB Model CB	1 个							

附件

孔塞 Hole Plug	4 个							
挂挂件Hanging Piece	4 个							
盖板Cover Plate (optional)	1 个							


宽度 Width mm	150	200	150	200	200	300	500	页码
高度 Height mm	150	200	300	300	400	400	500	
深度 Depth mm	120	120	120	120	120	120	120	
安装板 Mounting Plate	1 个							
型号 CB Model CB	1 个							

附件

孔塞 Hole Plug	4 个							
挂挂件Hanging Piece	4 个							
盖板Cover Plate (optional)	1 个							

外形尺寸可以按照要求定制,标准配置不变,颜色有特殊要求,底部加配凸台盖板及需要定制附件请在合同中注明。
Overall dimension can be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

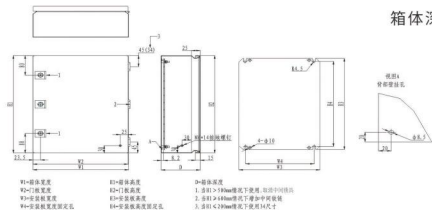


箱体深度

CB	宽度尺寸 Width				Height				深度 Depth
	W1	W2	W3	W4	H1	H2	H3	H4	
150*150*80	150	148	104	65	150	150	125	100	80
200*200*80	200	198	154	115	200	200	175	150	80
150*300*80	150	148	104	65	300	300	275	250	80
200*300*80	200	198	154	115	300	300	275	250	80
200*400*80	200	198	154	115	400	400	375	350	80
300*400*80	300	298	254	215	400	400	375	350	80
500*500*80	500	498	454	415	500	500	475	450	80
150*150*120	150	148	104	65	150	150	125	100	120
200*200*120	200	198	154	115	200	200	175	150	120
150*300*120	150	148	104	65	300	300	275	250	120
200*300*120	200	198	154	115	300	300	275	250	120
200*400*120	200	198	154	115	400	400	375	350	120
300*400*120	300	298	254	215	400	400	375	350	120
500*500*120	500	498	454	415	500	500	475	450	120



紧凑型控制箱MB Compact Control Box MB

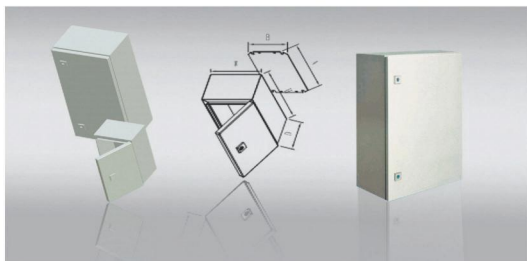

材料:

箱体: 钢板, 1.2mm. (当宽度或高度任意尺寸>=500mm 时厚度1.5mm)
门板: 钢板, 1.5mm (当宽度或高度任意尺寸>=500mm 时厚度2.0mm)

表面处理:

箱体和门板: 磷化, 喷涂粉末涂层
颜色RAL7035或者RAL7032 橘纹
安装板: 镀锌板, 2.5mm

防护等级: 防护等级IP54

标准配置:

箱体, 单门, 四周带聚氨酯泡沫塑料密封圈底部开进行凸台并配电缆盖板, 带1个小方锁固定在门板左侧, 镀锌安装板, 背板壁挂孔配孔塞, 壁挂件, 两根安装条

Material

Box: steel 1.5mm
(When width or height >= 500mm, steel is 1.5mm)
Door Plate: steel 2.0mm
When width or height >= 500mm, steel is 2.0mm

Surface Treatment:

Box & Door: foam plastic seal, Phosphating, Spraying Powder Coating,
Color RAL7035 or RAL7032 with orange peel
Mounting plate: galvanized plate 2.5mm

Protection: IP54

Standard Configuration

Box & single door with polyester foam plastic seal, Ccrt, i inlet with cover plate on bottom, one lock on the left of door, galvanized mounting plate rear plate, hanging hole plug, hanging piece mounting bars.

宽度(Width) 200~600, 高度(Height) 300~500

宽度 Width(mm)	数量 Quantity	200	300	300	380	380	380	页码 page
高度 Height(mm)		300	300	400	300	300	380	
深度 Depth(mm)		155	210	210	155	210	210	
安装板 Mounting Plate	1 个							
型号 Model MB	1 个							


宽度 Width(mm)	数量 Quantity	400	300	400	500	500	600	600	页码 page
高度 Height(mm)		400	500	500	500	500	380	380	
深度 Depth(mm)		210	210	210	210	300	210	350	
安装板 Mounting Plate	1 个								
型号 Model MB	1 个								

附件 Accessory

孔塞 Hole Plug	4 个								
壁挂件 Hanging Piece	4 个								
电缆盖板 Cable Cover Plate	1 个								
安装条 Mounting Bar	2 根								



紧凑型控制箱MB Compact Control Box MB

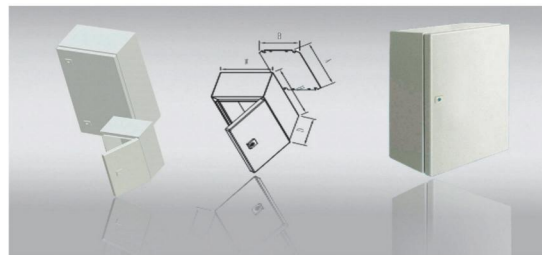

材料:

箱体: 钢板, 1.5mm. (当宽度或高度任意尺寸>=500mm 时厚度1.5mm)
门板: 钢板, 2.0mm (当宽度或高度任意尺寸>=500mm 时厚度2.0mm)

表面处理:

箱体和门板: 磷化, 喷涂粉末涂层
颜色RAL7035或者RAL7032 橘纹
安装板: 镀锌板, 2.5mm

防护等级: 防护等级IP54

标准配置:

箱体, 单门, 四周带聚氨酯泡沫塑料密封圈底部开进行凸台并配电缆盖板, 2把小方锁 固定在门板左侧, 镀锌安装板, 背板壁挂孔配孔塞, 壁挂件, 两根安装条

Material

Box: steel 1.5mm
(When width or height >= 500mm, steel is 1.5mm)
Door Plate: steel 2.0mm
When width or height >= 500mm, steel is 2.0mm

Surface Treatment:

Box & Door: foam plastic seal, Phosphating, Spraying Powder Coating,
Color RAL7035 or RAL7032 with orange peel
Mounting plate: galvanized plate 2.5mm

Protection: IP54

Standard Configuration

Box & single door with polyester foam plastic seal. Cable inlet with cover plate on bottom, two lock on the left of door, galvanized mounting plate rear plate, hanging hole plug, hanging piece mounting bars.

宽度(Width) 380~760, 高度(Height) 500~800

宽度 Width(mm)	数量 Quantity	380	380	600	600				页码 page
高度 Height(mm)		600	600	600	600				
深度 Depth(mm)		210	350	210	350				
安装板 Mounting Plate	1 个								
型号 Model MB	1 个								

宽度 Width(mm)	数量 Quantity	600	600	600	760	760		页码 page
高度 Height(mm)		760	760	800	760	760		
深度 Depth(mm)		210	350	250	210	350		
安装板 Mounting Plate	1 个							
型号 Model MB	1 个							

附件 Accessory

孔塞 Hole Plug	4 个								
壁挂件 Hanging Piece	4 个								
电缆盖板 Cable Cover Plate	1 个								
安装条 Mounting Bar	2 根								

外形尺寸可以按照要求定制, 标准配置不变, 颜色有特殊要求, 底部加配凸台盖板及需要定制附件时请在合同中注明。
Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.



紧装式控制箱 MB Compact Control Box MB

产品特点

东安的紧装式控制箱在原有的基础上进行了诸多改进,从而使得其质量更好,价格更低,使用更方便。

- 全自动的磷化、喷涂过程保证表面处理的质量更加稳定
- 区别于原有的生产方式使得质量和效率更高
- 提供了10多种模具生产的规格可供客户选择。

Feature

Dongan Compact Control Box makes great improvement based on former model, has better quality lower price and more convenient.

- Automatic phosphating, spray coating process guarantee surface treatment quality much more stable.
- New production mode makes better quality & efficiency.
- Over ten optional moulds to clients.



- ◆ 经过多重折边的防水槽在开门时防止脏物和水分的侵入,另外机械手焊接也保证拼缝处的焊接更加可靠美观



- ◆ 背部预留壁挂孔用于壁挂件或直接安装在墙壁上。




- ◆ 门板由模具一次成型,效率更高,外形更美观。

- ◆ Multiple folds water proof edge prevent dirt & water invasion. Robot welding guarantee edge joint much more reliable & beautiful.



- ◆ 底部电缆盖板在底部凸台成型后加密封圈固定在箱体上。




- ◆ 箱体上的接地螺钉提供了门板上的可靠接地

- ◆ After bottom cable inlet shaped, cable cover plate with seal ring on bottom is fixed on the box.

- ◆ Grounding screw on the box guarantee reliable ground connection

细节图 Details

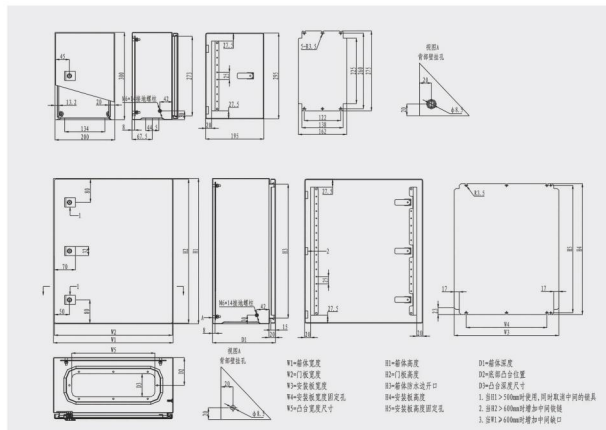

型号	宽度尺寸 Width			高度尺寸 Height			深度 Depth		
	H1	H2	H3	H4	H5	H6	D1	D2	D3
300*300*210	300	295	250	170	180	300	295	260	230
300*400*210	300	295	250	170	180	400	395	360	330
300*300*155	380	375	330	250	180	300	295	260	230
380*300*210	380	375	330	250	279	300	295	260	230
380*380*210	380	375	330	250	279	380	375	340	330
400*400*210	400	395	350	270	279	400	395	360	350
300*500*210	300	295	250	170	180	500	495	460	450
400*500*210	400	395	350	270	279	500	495	460	450
500*500*210	500	495	450	370	380	500	495	460	450
600*380*210	600	595	550	470	503	380	375	340	330
600*380*350	600	595	550	470	503	380	375	340	330
380*600*210	380	375	330	250	279	600	595	560	550
380*600*350	380	375	330	250	279	600	595	560	550
400*500*210	400	395	350	270	279	500	495	460	450
500*500*210	500	495	450	370	380	500	495	460	450
500*500*300	500	495	450	370	380	500	495	460	450
600*600*210	600	595	550	470	503	600	595	560	550
600*600*350	600	595	550	470	503	760	755	720	710
600*760*210	600	595	550	470	503	760	755	720	710
600*760*350	600	595	550	470	503	760	755	720	710
600*800*250	600	595	550	470	503	800	795	760	750
760*760*210	760	755	710	630	660	760	755	720	710
760*760*350	760	755	710	630	660	760	755	720	710



紧凑型控制箱 ME Compact Control Box ME



材料:

箱体: 钢板, 1.5mm.
门板: 钢板, 2.0mm

表面处理:

箱体和门板: 磷化, 喷涂粉末涂层
颜色 RAL7035 或者 RAL7032 橘纹
安装板: 镀锌板, 2.5mm.

防护等级:

防护等级: IP54

标准配置:

箱体宽度<1000mm单门,其余双门
四周带聚氨酯泡沫塑料密封圈底部
开进行凸台并配电缆盖板,平面位道锁
固定在门板左侧,镀锌安装板,背板
壁挂孔配孔塞,壁挂件,两根安装条

Material:

Box: steel 1.5mm
Door Plate: steel 2.0mm

Surface Treatment:

Box & Door: Phosphating, Spraying Powder Coating
Color RAL7035 or RAL7032 with orange peel,
Mounting plate: galvanized plate 2.5mm

Protection:

IP54

Standard Configuration:

Box, width<1000mm, single door others are double doors.
polyester foam plastic seal, cable inlet with cover plate on
bottom switch lock on the left of door, galvanized mounting
piece rear plate, hanging hole plug, hanging piece
two mounting bars

宽度 Width(mm)	数量 Quantity	600	600	600	600	800	1000	1000	页码 Page
高度 Height(mm)		800	800	1000	1200	1200	760	760	
深度 Depth(mm)									
门数 Doors		单门	单门	单门 Single	单门 Single	单门 Single	双门 Double	双门 Double	
安装板 Mounting Plate									
型号 Model ME	1个								

附件 Accessory

孔塞 Hole Plug	4个								
壁挂件 Hanging Piece	4个								
电缆盖板 Cable Cover Plate	1个								
安装条 Mounting Bar	2根								

宽度 Width(mm)	数量 Quantity	1000	1000	1000	1200		页码 Page
高度 Height(mm)		1000	1200	1400	1400		
深度 Depth(mm)		300	300	300	300		
门数 Doors		双门 Double	双门 Double	双门 Double	双门 Double		
安装板 Mounting Plate	1个						
型号 Model ME	1个						


附件 Accessory

孔塞 Hole Plug	4个						
壁挂件 Hanging Piece	4个						
电缆盖板 Cable Cover Plate	1个						
安装条 Mounting Bar	2根						

外形尺寸也可以按照要求定制,标准配置不变,颜色有特殊要求时请在合同中注明。

Overall dimension can be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

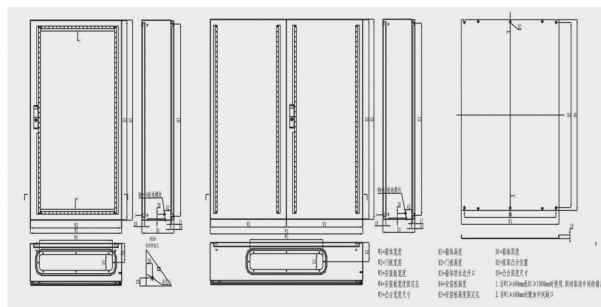

型号	宽度尺寸 Width				高度尺寸 Height					深度 Depth			
	W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3
600*800*210	600	595	540	500	503	800	795	760	754	724	210	95	118
600*800*300	600	595	540	500	503	800	795	760	754	724	300	140	118
600*1000*300	600	595	540	500	503	1000	995	960	954	924	300	140	118
600*1200*300	600	595	540	500	503	1200	1195	1160	1154	1124	300	140	118
1000*760*210	1000	996	940	900	903	760	755	720	714	684	210	95	118
1000*760*300	1000	996	940	900	903	760	755	720	714	684	300	140	118
1000*1000*300	1000	996	940	900	903	1000	995	960	954	924	300	140	118
1000*1200*300	1000	996	940	900	903	1200	1195	1160	1154	1124	300	140	118
1000*1400*300	1000	996	940	900	903	1400	1395	1360	1354	1324	300	140	118
1200*1400*300	1200	1196	1140	1100	1103	1400	1395	1360	1354	1324	300	140	118



悬臂箱DC Cantilever Box DC



材料:

箱体1.5mm 门板2.0mm

表面处理:

磷化、喷涂粉末涂层, 颜色RAL7035
或者RAL7032橘纹

防护等级: IP54

标准配置:

箱体、单门, 四周带聚氨酯泡沫密封圈
侧面圆镜, 铝型材把手, 镀锌安装板

Material:

Box 1.5mm Door Plate 2.0mm

Surface Treatment:

Phosphating, Spraying Powder Coating
Color RAL7035 or RAL7032 with orange peel
Protection: IP54

Standard Configuration:

Box, single door/polyester foam plastic seal
one drum lock on the flank/Aluminum handle

- 针对于机床等需要走动操作的行业设计的控制箱, 提供更加人性化的设计以及舒适的可视空间
This is a type of control box special design for industries like machine tools which need movement operation, provides more user-friendly design and comfortable visible space.
- 在MB箱体上改型, 具有MB箱体的大部分优点
Origin from MB series, remain most advantage.
- 顶部加强设计, 可以承受较大的吊装力量
Strengthen design on the top, affordable with great lifting power
- 两侧增加握紧把手更加便于走动式操作
Handles on the flanks make movement operation more convenient.
- 箱体左右两侧增加了Z型轨, 方便扎线或者安装器件
Z-shape track on the flanks make wire rolling or device installation more convenient.

宽度 Width(mm)	数量	200	300	380	380	400	400	页码Page
高度 Height(mm)		300	300	300	380	400	500	
深度 Depth(mm)		155	210	210	155	210	210	
安装板 Mounting Plate	1个							
型号 Model MB	1个							

附件 Accessory

悬挂件 Hanging Piece	4个							
安装板 Mounting Bar	2根							

宽度 Width(mm)	数量	500	380					页码 Page
高度 Height(mm)		500	600					
深度 Depth(mm)		210	210					
安装板 Mounting Plate	1个							
型号 Model MB	1个							


附件 Accessory

安装板 Mounting Bar	2根							
------------------	----	--	--	--	--	--	--	--

外形尺寸也可以按照要求定制, 标准配置不变, 颜色有特殊要求时请在合同中注明。

Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

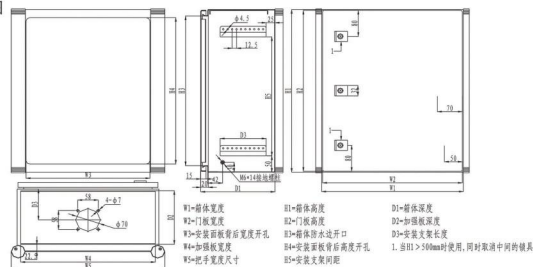

DC	宽度尺寸 Width					高度尺寸 Height					深度 Depth		
	W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3
200*300*155	200	195	150	180	235	300	295	260	250	166	155	110	75
300*300*210	300	295	250	280	335	300	295	260	250	166	210	165	130
300*400*210	300	295	250	280	335	400	395	360	350	266	210	165	130
380*300*210	380	375	330	360	415	300	295	260	250	166	210	165	130
380*380*210	380	375	330	360	415	380	375	340	330	246	210	165	130
400*400*210	400	395	350	380	435	400	395	360	350	266	210	165	130
400*500*210	400	395	350	380	435	500	495	460	450	366	210	165	130
500*500*210	500	495	450	480	535	500	495	460	450	366	210	165	130
380*600*210	380	375	330	360	415	600	595	560	550	466	210	165	130



独立式控制箱MS

Detached Control Cabinet MS

- 产品特点: MS是一种4面焊接的独立式控制箱
- Features: MS is a kind of all welding Detached Control Cabinet



材料:

箱体1.5mm,门板2.0mm后背板1.5mm,安装板2.5mm

表面处理:

磷化,喷涂粉末涂层,颜色RAL7032或者RAL7035橘纹,安装板镀锌

防护等级:IP54,IP55

标准配置:

箱体宽度<1000mm单门,铰链在右侧,其余

双门,平面铰链锁,后背板可以拆卸,后背板门板上均有聚氨酯泡沫密封胶,镀锌安装板,两排孔纵梁2根,吊环4个,门安装条2根,门板上贴A4资料盒.

Material:

Enclosure 1.5mm, Door Plate 2.0mm, Rear Plate 1.5mm, Mounting Plate 2.5mm

Surface Treatment:

Phosphating, Spraying Powder Coating, Color RAL7035 or RAL7032 with orange peel, Mounting Plate is galvanized

Protection Level: IP54, IP55

Standard Configuration:

enclosure, width<1000mm, single door, right side hinges, others are double plates, switch lock, demountable rear plate, rear plate & doors with polyurethane foam seal, galvanized mounting plate, two two-parallel-hole stringers, four hanging rings, two mounting bars,A4size file case on front door.




独立式控制箱MS

Detached Control Cabinet MS



MS独立式控制箱为各行业提供了一种经济实用的解决方案,在无需并柜的情况下,可以使用MS独立控制箱。内部安装尺寸及附件完全与DS实现互换安装。由于4面焊接因此MS独立式控制箱防护等级可以做的更高。

MS Detached Control Cabinet provides an economic solution for various applications. Clients could choose MS system without combined-cabinets demands. Internal installation size & accessories of MS&DS could completely interchange. The protection level of MS system could make higher when it applied all welding solution.



侧板及顶底板由原来折弯成型改进为一次辊轧成型,使得质量更好,效率更高。另外凸起的防水边使得防水效果更好。

The side plate, top & bottom plate improved from bending-formed to once roll-formed which has higher quality & better efficiency. The raised waterproof edge makes better waterproof effect

宽度 Width(mm)	数量 Quantity	600	800	1200	600	800	700	800	800	1000	1200	600	800	1000	1000	800	600
高度 Height(mm)		1600	1600	1600	1800	1800	1800	1800	1800	1800	1800	2000	2000	2000	2000	2000	2000
深度 Depth(mm)		400	500	500	400	500	500	500	400	400	400	500	500	500	600	600	600
门数 Doors		1	1	2	1	1	1	1	1	2	2	1	1	2	2	1	1
安装板 Mounting Plate	1个																
型号 Model MS	1个																

宽度 Width(mm)	数量 Quantity	1000	1200	1200	1200	700	600	800	1000	1200	600	800	1000	1200	800	1000	1200
高度 Height(mm)		2000	2000	2000	2000	2100	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
深度 Depth(mm)		800	600	800	500	500	500	500	500	500	600	600	600	600	800	800	800
门数 Doors		2	2	2	2	1	1	1	2	2	1	1	2	2	1	2	2
安装板 Mounting Plate	1个																
型号 Model MS	1个																

附件 Accessory


安装条 Mounting Bar	2根																
------------------	----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



独立式控制箱MS

Detached Control Cabinet MS

细节图 Details

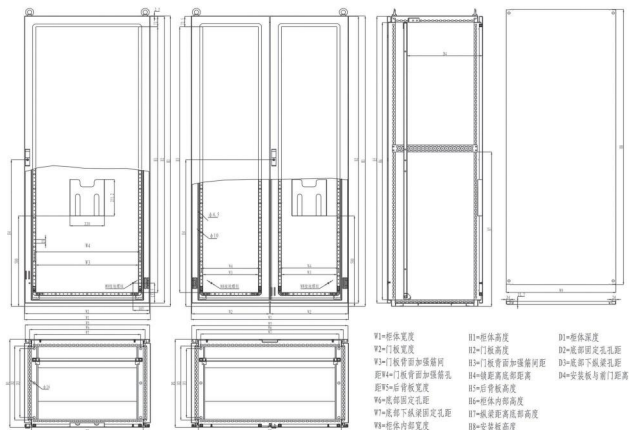

规格尺寸	W1	W2	W3	W4	W5	W6	W7	W8	W9	H1	H2	H3	H4	H5	H6	H7	H8	H9	D1	D2	D3	D4	D5	D6	D7	D8	D9
1000*600*600	600	1000	1000	1000	1000	1000	1000	1000	1000	600	1000	1000	1000	1000	1000	1000	1000	1000	600	1000	1000	1000	1000	1000	1000	1000	1000
1000*800*600	800	1000	1000	1000	1000	1000	1000	1000	1000	800	1000	1000	1000	1000	1000	1000	1000	1000	800	1000	1000	1000	1000	1000	1000	1000	1000
1000*1000*600	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
1000*1200*600	1200	1000	1000	1000	1000	1000	1000	1000	1000	1200	1000	1000	1000	1000	1000	1000	1000	1000	1200	1000	1000	1000	1000	1000	1000	1000	1000
1000*1400*600	1400	1000	1000	1000	1000	1000	1000	1000	1000	1400	1000	1000	1000	1000	1000	1000	1000	1000	1400	1000	1000	1000	1000	1000	1000	1000	1000
1000*1600*600	1600	1000	1000	1000	1000	1000	1000	1000	1000	1600	1000	1000	1000	1000	1000	1000	1000	1000	1600	1000	1000	1000	1000	1000	1000	1000	1000
1000*1800*600	1800	1000	1000	1000	1000	1000	1000	1000	1000	1800	1000	1000	1000	1000	1000	1000	1000	1000	1800	1000	1000	1000	1000	1000	1000	1000	1000
1000*2000*600	2000	1000	1000	1000	1000	1000	1000	1000	1000	2000	1000	1000	1000	1000	1000	1000	1000	1000	2000	1000	1000	1000	1000	1000	1000	1000	1000
1000*2200*600	2200	1000	1000	1000	1000	1000	1000	1000	1000	2200	1000	1000	1000	1000	1000	1000	1000	1000	2200	1000	1000	1000	1000	1000	1000	1000	1000
1000*2400*600	2400	1000	1000	1000	1000	1000	1000	1000	1000	2400	1000	1000	1000	1000	1000	1000	1000	1000	2400	1000	1000	1000	1000	1000	1000	1000	1000
1000*2600*600	2600	1000	1000	1000	1000	1000	1000	1000	1000	2600	1000	1000	1000	1000	1000	1000	1000	1000	2600	1000	1000	1000	1000	1000	1000	1000	1000
1000*2800*600	2800	1000	1000	1000	1000	1000	1000	1000	1000	2800	1000	1000	1000	1000	1000	1000	1000	1000	2800	1000	1000	1000	1000	1000	1000	1000	1000
1000*3000*600	3000	1000	1000	1000	1000	1000	1000	1000	1000	3000	1000	1000	1000	1000	1000	1000	1000	1000	3000	1000	1000	1000	1000	1000	1000	1000	1000
1000*3200*600	3200	1000	1000	1000	1000	1000	1000	1000	1000	3200	1000	1000	1000	1000	1000	1000	1000	1000	3200	1000	1000	1000	1000	1000	1000	1000	1000
1000*3400*600	3400	1000	1000	1000	1000	1000	1000	1000	1000	3400	1000	1000	1000	1000	1000	1000	1000	1000	3400	1000	1000	1000	1000	1000	1000	1000	1000
1000*3600*600	3600	1000	1000	1000	1000	1000	1000	1000	1000	3600	1000	1000	1000	1000	1000	1000	1000	1000	3600	1000	1000	1000	1000	1000	1000	1000	1000
1000*3800*600	3800	1000	1000	1000	1000	1000	1000	1000	1000	3800	1000	1000	1000	1000	1000	1000	1000	1000	3800	1000	1000	1000	1000	1000	1000	1000	1000
1000*4000*600	4000	1000	1000	1000	1000	1000	1000	1000	1000	4000	1000	1000	1000	1000	1000	1000	1000	1000	4000	1000	1000	1000	1000	1000	1000	1000	1000
1000*4200*600	4200	1000	1000	1000	1000	1000	1000	1000	1000	4200	1000	1000	1000	1000	1000	1000	1000	1000	4200	1000	1000	1000	1000	1000	1000	1000	1000
1000*4400*600	4400	1000	1000	1000	1000	1000	1000	1000	1000	4400	1000	1000	1000	1000	1000	1000	1000	1000	4400	1000	1000	1000	1000	1000	1000	1000	1000
1000*4600*600	4600	1000	1000	1000	1000	1000	1000	1000	1000	4600	1000	1000	1000	1000	1000	1000	1000	1000	4600	1000	1000	1000	1000	1000	1000	1000	1000
1000*4800*600	4800	1000	1000	1000	1000	1000	1000	1000	1000	4800	1000	1000	1000	1000	1000	1000	1000	1000	4800	1000	1000	1000	1000	1000	1000	1000	1000
1000*5000*600	5000	1000	1000	1000	1000	1000	1000	1000	1000	5000	1000	1000	1000	1000	1000	1000	1000	1000	5000	1000	1000	1000	1000	1000	1000	1000	1000
1000*5200*600	5200	1000	1000	1000	1000	1000	1000	1000	1000	5200	1000	1000	1000	1000	1000	1000	1000	1000	5200	1000	1000	1000	1000	1000	1000	1000	1000
1000*5400*600	5400	1000	1000	1000	1000	1000	1000	1000	1000	5400	1000	1000	1000	1000	1000	1000	1000	1000	5400	1000	1000	1000	1000	1000	1000	1000	1000
1000*5600*600	5600	1000	1000	1000	1000	1000	1000	1000	1000	5600	1000	1000	1000	1000	1000	1000	1000	1000	5600	1000	1000	1000	1000	1000	1000	1000	1000
1000*5800*600	5800	1000	1000	1000	1000	1000	1000	1000	1000	5800	1000	1000	1000	1000	1000	1000	1000	1000	5800	1000	1000	1000	1000	1000	1000	1000	1000
1000*6000*600	6000	1000	1000	1000	1000	1000	1000	1000	1000	6000	1000	1000	1000	1000	1000	1000	1000	1000	6000	1000	1000	1000	1000	1000	1000	1000	1000



并联柜系统DS

DS Combined-Cabinets System



产品特点 (Features):

- DS并联柜系统秉承标准化，模块化的概念，为各行业提供多种完美，快速，高性价比的解决方案。
- DS Combined-Cabinets System adhering to standardized & modularized concept provides perfect, fast, and high cost performance solutions to various industries.
- 在DS标准框架的基础上，可以演变出诸多柜型，满足不同客户的需求。
- Based on DS standard framework, the system has various combinations which could satisfy various demands.



- DS框架型材提供了完美的静力学特性以及宽敞的内部安装空间。完全由自己加工，全自动化的加工过程保证了高品质，低成本。
- DS frame profile could provide perfect static characteristic & spacious internal installation space. This could completely processed by ourselves, and full automatic process guarantee high quality & low cost.




- 采用专用夹具焊接保证了框架的一致性和可靠性，同时也提高了加工效率。
- Use special fixture welding to guarantee consistency & reliability of framework, and also raise processing efficiency.



- 提供众多标准化的内部结构件可以根据客户的不同要求进行组合，满足多种位置的安装需求。同时也可以让我们的客户参与柜体的设计中来，从而提供快速，准确和高品质的服务。
- Provide many standardized internal structures to satisfy different combination demands of clients, also to meet installation requirements of various positions. Meanwhile also allow our clients to join the cabinet design, in order to provide fast, accuracy and high quality service.

并联柜系统DS DS Combined-Cabinets System

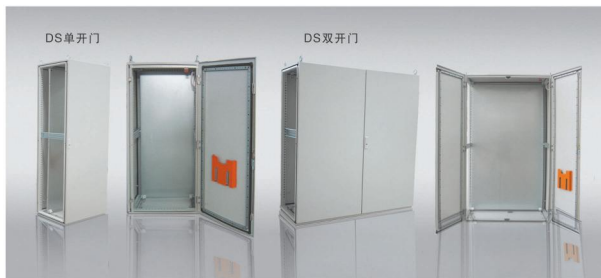

材 料: 框架1.5mm, 门板2.0mm侧板, 后背板, 顶底板1.5mm, 安装板2.5mm.

表面处理: 磷化, 喷涂粉末涂层, 颜色RAL7032或RAL7035橘纹, 安装板, 纵梁镀锌.

防护等级: IP54, IP55

标准配置: 箱体, 宽度 < 1000mm 单门, 铰链在右侧, 其余双门, 平面铰链锁, 侧板, 后背板可以拆卸, 后背板, 门板, 侧板上均有聚氨酯泡沫密封圈, 镀锌安装板, 三排孔纵梁2根, 吊环4个, 门安装条2根, 门板上贴A4资料盒.

Material: Framework 1.5mm, Door Plate 2.0mm, Side Plate, Rear Plate, Top & Bottom Plate 1.5mm Mounting Plate 2.5mm

Surface Treatment: Phosphating, Spraying Powder Coating, Color RAL7035 or RAL7032 with orange peel, Mounting Plate & Beam are galvanized

Protection Level: IP54, IP55

Standard Configuration: enclosure, width<1000mm, single door, right side hinges, others are double plates with lock, demountable rear plate, rear plate, doors & side plate with polyurethane foam seal, galvanized mounting plate, three two-parallel-hole stringers, four hanging rings, two mounting bars, A4 size file case on front door.

宽度 Width(mm)	数量 Quantity	600	800	1200	1600	2000	2400	2800	3200	3600	4000	4400	4800	5200	5600	6000
高度 Height(mm)		1600	1600	1600	1800	1800	1800	1800	1800	2000	2000	2000	2000	2000	2000	2000
深度 Depth(mm)		400	500	500	400	500	500	400	400	400	500	500	500	600	600	800
门数 Doors		1	1	2	1	1	1	1	2	2	1	1	2	2	1	1
安装板 Mounting Plate	1个	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
型号 Model MS	1个	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1


宽度 Width(mm)	数量 Quantity	1000	1200	1200	1200	700	600	800	1000	1200	600	800	1000	1200	800	1000	1200
高度 Height(mm)		2000	2000	2000	2000	2100	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
深度 Depth(mm)		800	600	800	500	500	500	500	500	500	600	600	600	800	800	800	800
门数 Doors		2	2	2	2	1	1	1	2	2	1	1	2	2	1	2	2
安装板 Mounting Plate	1个																
型号 Model MS	1个																

附件 Accessory

安装条 Mounting Bar	2根															
------------------	----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

并联柜系统DS DS Combined-Cabinets System

细节图 Details

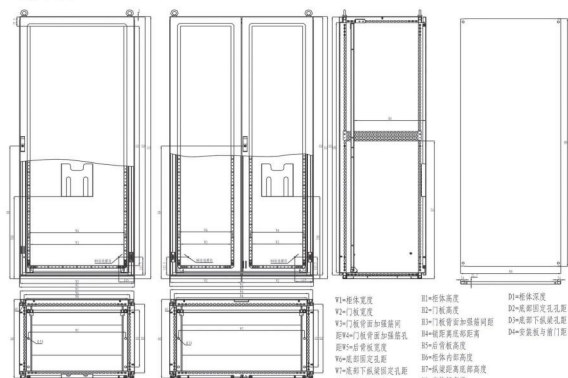

V1=柜体宽度
 V2=门板宽度
 V3=门板铰链安装距离
 V4=门板铰链安装距离
 V5=门板铰链安装距离
 V6=门板铰链安装距离
 V7=门板铰链安装距离
 V8=门板铰链安装距离
 V9=门板铰链安装距离
 V10=门板铰链安装距离
 V11=门板铰链安装距离
 V12=门板铰链安装距离
 V13=门板铰链安装距离
 V14=门板铰链安装距离
 V15=门板铰链安装距离
 V16=门板铰链安装距离
 V17=门板铰链安装距离
 V18=门板铰链安装距离
 V19=门板铰链安装距离
 V20=门板铰链安装距离
 V21=门板铰链安装距离
 V22=门板铰链安装距离
 V23=门板铰链安装距离
 V24=门板铰链安装距离
 V25=门板铰链安装距离
 V26=门板铰链安装距离
 V27=门板铰链安装距离
 V28=门板铰链安装距离
 V29=门板铰链安装距离
 V30=门板铰链安装距离
 V31=门板铰链安装距离
 V32=门板铰链安装距离
 V33=门板铰链安装距离
 V34=门板铰链安装距离
 V35=门板铰链安装距离
 V36=门板铰链安装距离
 V37=门板铰链安装距离
 V38=门板铰链安装距离
 V39=门板铰链安装距离
 V40=门板铰链安装距离
 V41=门板铰链安装距离
 V42=门板铰链安装距离
 V43=门板铰链安装距离
 V44=门板铰链安装距离
 V45=门板铰链安装距离
 V46=门板铰链安装距离
 V47=门板铰链安装距离
 V48=门板铰链安装距离
 V49=门板铰链安装距离
 V50=门板铰链安装距离
 V51=门板铰链安装距离
 V52=门板铰链安装距离
 V53=门板铰链安装距离
 V54=门板铰链安装距离
 V55=门板铰链安装距离
 V56=门板铰链安装距离
 V57=门板铰链安装距离
 V58=门板铰链安装距离
 V59=门板铰链安装距离
 V60=门板铰链安装距离
 V61=门板铰链安装距离
 V62=门板铰链安装距离
 V63=门板铰链安装距离
 V64=门板铰链安装距离
 V65=门板铰链安装距离
 V66=门板铰链安装距离
 V67=门板铰链安装距离
 V68=门板铰链安装距离
 V69=门板铰链安装距离
 V70=门板铰链安装距离
 V71=门板铰链安装距离
 V72=门板铰链安装距离
 V73=门板铰链安装距离
 V74=门板铰链安装距离
 V75=门板铰链安装距离
 V76=门板铰链安装距离
 V77=门板铰链安装距离
 V78=门板铰链安装距离
 V79=门板铰链安装距离
 V80=门板铰链安装距离
 V81=门板铰链安装距离
 V82=门板铰链安装距离
 V83=门板铰链安装距离
 V84=门板铰链安装距离
 V85=门板铰链安装距离
 V86=门板铰链安装距离
 V87=门板铰链安装距离
 V88=门板铰链安装距离
 V89=门板铰链安装距离
 V90=门板铰链安装距离
 V91=门板铰链安装距离
 V92=门板铰链安装距离
 V93=门板铰链安装距离
 V94=门板铰链安装距离
 V95=门板铰链安装距离
 V96=门板铰链安装距离
 V97=门板铰链安装距离
 V98=门板铰链安装距离
 V99=门板铰链安装距离
 V100=门板铰链安装距离

宽度 Width	数量 Quantity	600	800	1200	1600	2000	2400	2800	3200	3600	4000	4400	4800	5200	5600	6000
高度 Height		1600	1600	1600	1800	1800	1800	1800	1800	2000	2000	2000	2000	2000	2000	2000
深度 Depth		400	500	500	400	500	500	400	400	400	500	500	500	600	600	800
门数 Doors		1	1	2	1	1	1	1	2	2	1	1	2	2	1	1
安装板 Mounting Plate	1个	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
型号 Model MS	1个	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

VS 十六折框架式通用控制柜 VS 16 - Fold Frame Type General Control Cabinet



产品特点 (Product Features):

- 以 25mm 为单位的模数孔精确定位安装板。使用塑料滑块可轻松推动安装板，单人装配更便捷
- The mounting plate is positioned accurately with the 25mm module holes. The plastic slider is used to push the mounting plate easily for convenient assembly by one person.
- 对称框架结构，使得无论前后左右或是向上都可以进行快速并柜，稳定且持久
- With symmetrical frame structure, the cabinets can be combined quickly in the front and back, left and right or upward, stable and durable.
- 标准化，模块化的概念，为各行业提供多种完美，快速，高性价比的解决方案
- With the standardized and modular concept, provide a variety of perfect, fast and high-effective solutions for various industries.
- 在宽度和高度的内部扩展中使用相同的系统附件，内部扩展性更高，为用户提供更多安装可能性
- The same system accessories are used in the internal expansion of width and height, and the internal expansion is higher, providing the user with more installation possibilities.
- 框架型材经过电泳工艺，防腐、防锈性能明显优于传统工艺
- The frame profile has subject to the electrophoretic process, and its anti-corrosion and anti-rust performance is anti-corrosion and anti-rust performance is significantly better than that of the traditional process.



- 框架上对称面在宽度和高度上有相同的模数孔，
- With same module holes on the symmetrical surface of the frame in width and height;
- 可以扩充丰富的附件，加大安装空间。
- Rich accessories can be expanded, increasing installation space.



- 可多方向实现并柜，给予客户更加灵活的现场解决方案。
- The cabinets can be combined in multiple directions, giving users more flexible field solutions.




- HT 框架型材提供了完美的静态力学特性以及宽敞的内部安装空间，完全由自己加工，全自动辊轧线的加工过程保障了高品质、低成本。
- The HT frame profile provides perfect static mechanical properties and a spacious internal installation space, and it can be completely processed automatically, and the machining process of the automatic rolling line guarantees high quality and low cost.

VS 十六折框架式通用控制柜 VS 16 - Fold Frame Type General Control Cabinet

细节图

Detailed drawings

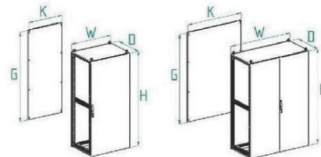

产品材料:

Product materials:

框架: 钢板, 1.5mm 侧板、后盖板: 钢板, 1.5mm
Frame: Steel plate, 1.5 mm side plate; rear backplate: Steel plate, 1.5 mm
门板: 钢板, 2.0mm 安装板: 镀锌板, 2.5mm
Door panel: Steel plate, 2.0 mm; mounting plate: Galvanized plate, 2.5 mm

标准配置:

Standard configuration:

十六折型材框架, 顶板, 底板, 后盖板, 吊环 4 个前单开门 (1000mm 宽及以上双开门)
16 - fold profile frame, top plate, bottom plate, rear backplate, 4 lifting rings, front single-swing doors (1000 mm width and above double-swing door)

热镀锌安装板 1 块

1 hot-dip galvanized mounting plate

底部 3 块进线活动板

3 incoming movable plates at bottom
安装纵梁 2 根

2 mounting stringers

标准含锁 1 把

1 standard turnout lock

木托

Wooden plate

表面处理:

Surface treatment:

框架: 电泳安装板: 镀锌钢板

Frame: Electrophoresis mounting plate: Galvanized steel plate

柜体和门: 前处理 (纳米陶瓷), 粉末涂层, 橘纹

Cabinet and doors: Pre-treatment (nanophase ceramics), power coating, orange peel finish

颜色:

Color:

测试报告:

Test report:

标准 RAL7035

Standard RAL7035

防护等级震动

Protection grade vibration

其他颜色可订制

Other color can be customized

防护等级:

Protection grade:

产品认证:

Product certification:

标准 IP54 (双门) / IP55 (单门) CE

Standard IP54 (dual-swing door) / IP55 (single-swing door) CE

最高 IP55 (双门) / IP66 (单门)

Up to IP55 (dual-swing door) / IP66 (single-swing door)

高度 mm Height mm	1600	1600	1600	1600	1800
宽度 mm Width mm	600	600	800	1200	600
深度 mm Depth mm	400	600	500	500	400
安装板高度 mm Mounting plate height mm	1496	1496	1496	1496	1696
安装板宽度 mm Mounting plate width mm	499	499	699	1099	499
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS16040	VS16060	VS16050	VS161250	VS16040
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP54	IP55

产品供货范围

Scope of product supply

门 Door	1	1	1	2	1
平面金道锁 Flat turnout lock	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	1	1	1	2	1
木托 Wooden pallet	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■
灯具 Lamp	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■
门制动带 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■
底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

高度 mm Height mm	1800	1800	1800	1800	1800
宽度 mm Width mm	800	1000	1200	600	700
深度 mm Depth mm	400	400	400	500	500

箱、柜体系列

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

安装板高度 mm Mounting plate height mm	1696	1696	1696	1696	1696
安装板宽度 mm Mounting plate width mm	699	899	1099	499	599
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS18040	VS181040	VS181240	VS186050	VS187050
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP54	IP54	IP55	IP55

产品供货范围选购配件

Optional accessories within the scope of supply of the product

门 Door	1	2	2	1	1
平面金道锁 Flat turnout lock	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	1	2	2	1	1
木托 Wooden pallet	1	1	1	1	1

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

选购配件

Optional accessories

侧板	■	■	■	■	■
Side plate	■	■	■	■	■
三排孔安装横梁	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■
门安装条	■	■	■	■	■
Door mounting strips	■	■	■	■	■
灯具	■	■	■	■	■
Lamp	■	■	■	■	■
门限位开关	■	■	■	■	■
Door limit switch	■	■	■	■	■
门制动器	■	■	■	■	■
Door brake	■	■	■	■	■
文件袋	■	■	■	■	■
File bag	■	■	■	■	■
电脑托盘	■	■	■	■	■
Computer tray	■	■	■	■	■
底座	■	■	■	■	■
Base	■	■	■	■	■
并柜附件	■	■	■	■	■
Cabinet combination accessory	■	■	■	■	■

高度 mm	1800	1800	1800	1800	1800
Height mm	1800	1800	1800	1800	1800
宽度 mm	800	1200	800	1200	1200
Width mm	800	1200	800	1200	1200
深度 mm	500	500	600	600	600
Depth mm	500	500	600	600	600
安装板高度 mm	1696	1696	1696	1696	1736
Mounting plate height mm	1696	1696	1696	1696	1736
安装板宽度 mm	699	1099	699	1099	1099
Mounting plate width mm	699	1099	699	1099	1099

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

柜体材料厚度 mm	1.5	1.5	1.5	1.5	1.5
Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm	2.0	2.0	2.0	2.0	2.0
Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm	2.5	2.5	2.5	2.5	2.5
Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号	VS188050	VS181250	VS188060	VS181260	VS191260
Model	VS188050	VS181250	VS188060	VS181260	VS191260
防护等级 IP, 符合 IEC60529 标准	IP55	IP54	IP55	IP54	IP54
Protection grade IP, comply with the IEC60529 standard	IP55	IP54	IP55	IP54	IP54

产品供货范围

Scope of supply of the product

门	1	2	1	2	2
Door	1	2	1	2	2
平面盆锁	1	1	1	1	1
Flat turnout lock	1	1	1	1	1
安装横梁	2	2	2	2	2
Mounting stringer	2	2	2	2	2
进线活动板	3	3	3	3	3
Incoming movable plate	3	3	3	3	3
吊环	4	4	4	4	4
Lifting ring	4	4	4	4	4
接地线	1	2	1	2	2
Earthing wire	1	2	1	2	2
木托	1	1	1	1	1
Wooden pallet	1	1	1	1	1

选购配件

Optional accessories

侧板	■	■	■	■	■
Side plate	■	■	■	■	■
三排孔安装横梁	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

门安装条	■	■	■	■	■
Door mounting strips	■	■	■	■	■
灯具	■	■	■	■	■
Lamp	■	■	■	■	■
门限位开关	■	■	■	■	■
Door limit switch	■	■	■	■	■
门制动器	■	■	■	■	■
Door brake	■	■	■	■	■
文件袋	■	■	■	■	■
File bag	■	■	■	■	■
电脑托盘	■	■	■	■	■
Computer tray	■	■	■	■	■
底座	■	■	■	■	■
Base	■	■	■	■	■
开柜附件	■	■	■	■	■
Cabinet combination accessory	■	■	■	■	■

高度 mm	2000	2000	2000	2000	2000
Height mm	2000	2000	2000	2000	2000
宽度 mm	800	1000	1200	600	800
Width mm	800	1000	1200	600	800
深度 mm	400	400	400	500	500
Depth mm	400	400	400	500	500
安装板高度 mm	1896	1896	1896	1896	1896
Mounting plate height mm	1896	1896	1896	1896	1896
安装板宽度 mm	699	899	1099	499	699
Mounting plate width mm	699	899	1099	499	699
柜体材料厚度 mm	1.5	1.5	1.5	1.5	1.5
Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm	2.0	2.0	2.0	2.0	2.0
Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm	2.5	2.5	2.5	2.5	2.5
Mounting thickness mm	2.5	2.5	2.5	2.5	2.5

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

型号	VS208040	VS201040	VS201240	VS206050	VS208050
Model	VS208040	VS201040	VS201240	VS206050	VS208050
防护等级 IP, 符合 IEC60529 标准	IP55	IP54	IP54	IP55	IP55
Protection grade IP, comply with the IEC60529 standard	IP55	IP54	IP54	IP55	IP55

产品供货范围

Scope of supply of the product

门	1	2	2	1	1
Door	1	2	2	1	1
平面合页锁	1	1	1	1	1
Flat turnout lock	1	1	1	1	1
安装纵梁	2	2	2	2	2
Mounting stringer	2	2	2	2	2
进线活动板	3	3	3	3	3
Incoming movable plate	3	3	3	3	3
吊环	4	4	4	4	4
Lifting ring	4	4	4	4	4
接地线	1	2	2	1	1
Earthing wire	1	2	2	1	1
木托	1	1	1	1	1
Wooden pallet	1	1	1	1	1

选购配件

Optional accessories

侧板	■	■	■	■	■
Side plate	■	■	■	■	■
三排孔安装纵梁	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■
门安装条	■	■	■	■	■
Door mounting strips	■	■	■	■	■
灯具	■	■	■	■	■
Lamp	■	■	■	■	■
门限位开关	■	■	■	■	■
Door limit switch	■	■	■	■	■

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

门制动器 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■
底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

高度 mm Height mm	2000	2000	2000	2000	2000
宽度 mm Width mm	1000	1200	600	800	1000
深度 mm Depth mm	500	500	600	600	600
安装板高度 mm Mounting plate height mm	1896	1896	1896	1896	1896
安装板宽度 mm Mounting plate width mm	899	1099	499	699	899
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS201050	VS201250	VS206060	VS208060	VS201060
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP54	IP54	IP55	IP55	IP54

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

产品供货范围

Scope of supply of the product

门 Door	2	2	1	1	2
平面铰链锁 Flat turnout lock	1	1	1	1	1
安装横梁 Mounting stringer	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	2	2	1	1	2
木托 Wooden pallet	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■
三排孔安装横梁 Mounting stringer with three rows of holes	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■
灯具 Lamp	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

高度 mm Height mm	2000	2000	2000	2000	2100
宽度 mm Width mm	1200	800	1000	1200	700
深度 mm Depth mm	600	800	800	800	500
安装板高度 mm Mounting plate height mm	1896	1896	1896	1896	1996
安装板宽度 mm Mounting plate width mm	1099	699	899	1099	599
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS201260	VS208080	VS201080	VS201280	VS217050
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP54	IP55	IP54	IP54	IP55

产品供货范围

Scope of supply of the product

门 Door	2	1	2	2	1
平开合页锁 Flat turnout lock	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2

箱、柜体系列

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

进线活动板 Incoming moveable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	2	1	2	2	1
木托 Wooden pallet	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■
灯具 Lamp	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■
底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

高度 mm Height mm	2200	2200	2200	2200	2200
--------------------	------	------	------	------	------

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

宽度 mm Width mm	600	600	800	1000	1200
深度 mm Depth mm	500	600	500	500	500
安装板高度 mm Mounting plate height mm	2096	2096	2096	2096	2096
安装板宽度 mm Mounting plate width mm	499	499	699	899	1099
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS226050	VS226060	VS228050	VS221050	VS221250
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP54	IP54

产品供货范围

Scope of supply of the product

门 Door	1	1	1	2	2
平面凸锁 Flat turnout lock	1	1	1	1	1
安装横梁 Mounting stringer	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	1	1	1	2	2

箱、柜体系列

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

木托 Wooden pallet	1	1	1	1	1
---------------------	---	---	---	---	---

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■
三排孔安装横梁 Mounting stringer with three rows of holes	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■
灯具 Lamp	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■
底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

高度 mm Height mm	2200	2200	2200	2200	2200
宽度 mm Width mm	800	1000	1200	800	1000
深度 mm Depth mm	600	600	600	800	800

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

安装板高度 mm Mounting plate height mm	2096	2096	2096	2096	2096
安装板宽度 mm Mounting plate width mm	699	899	1099	699	899
柜体材料厚度 mm Cabinet material thickness mm	1.5	1.5	1.5	1.5	1.5
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5
型号 Model	VS228060	VS221060	VS221260	VS228080	VS221080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP54	IP54	IP55	IP54

产品供货范围

Scope of supply of the product

门 Door	1	2	2	1	2
平面金锁锁 Flat turnout lock	1	1	1	1	1
安装横梁 Mounting stringer	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4
接地线 Earthing wire	1	2	2	1	2
木托 Wooden pallet	1	1	1	1	1

箱、柜体系列

VS 十六折框架式通用控制柜 VS 16 – Fold Frame Type General Control Cabinet

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■
三排孔安装横梁 Mounting stringer with three rows of holes	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■
灯具 Lamp	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■
文件袋 File bag	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■
底座 Base	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET



产品特点:

Product features:

- 新型 15 折型材框架结构，荣获多国专利
- With new 15-fold profile frame structure, win many national patents.



- 2.0mm 冷轧钢板连续折弯成型
- With continuous flange face design, fast water drainage, and good waterproofing
- 模块化设计实现单人快速组装
- With modular design, realize quick assembly by one person
- 连续法兰面设计，排水快，防水性更好
- Parts are easily installed, fast and safe



- 内侧双排 25mm 间距连续安装孔
- Continuous mounting holes with a 25mm spacing of two rows inside
- 六面对称式结构实现无限扩充功能
- With six-sided symmetrical structure, realize infinite expansion function




- 支持扁平包装，节省仓储及物流空间 IP66 高防护等级，符合 IEC60529 标准高承重结构通过 CE 认证，符合 IEC62208 标准
- Support flat packaging, saving storage and logistics space, with IP66 high protection grade, comply with the IEC60529 standard; the high load bearing structure passes the CE certification and complies with the IEC62208 standard.

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

细节图

Detailed drawings



产品材料:

Product materials:

框架: 钢板, 2.0mm 顶板、后背板: 钢板, 1.5mm
Frame: Steel plate, 2.0 mm top plate; rear backplate: Steel plate, 1.5 mm
门板: 钢板, 2.0mm 安装板: 镀锌板, 2.5mm
Door panel: Steel plate, 2.0 mm; mounting plate: Galvanized plate, 2.5 mm

标准配置:

Standard configuration:

十五折型材框架, 顶板, 底板, 后背板, 吊环 4 个
前单开门 (1000mm 宽及以上双开门)
15 - fold profile frame, top plate, bottom plate, rear backplate, 4 lifting rings, front single-swing doors (1000 mm width and above double-swing door)
热镀锌安装板 1 块
1 hot-dip galvanized mounting plate
底部块进线活动板
Incoming movable plates at bottom
安装纵梁 2 根
2 mounting stringers
MS8023-1W 平面锁
MS8023-1W flat lock

表面处理:

Surface treatment:

柜体和门: 前处理 (纳米陶瓷); 粉末涂层, 橘纹
Cabinet and doors: Pre-treatment (nanophase ceramics), power coating, orange peel finish
安装板: 镀锌钢板
Mounting plate: Galvanized steel plate

颜色:

Color:

测试报告:

Test report:

标准 RAL7035 或 RAL7032
Standard RAL7035 or RAL7032 防护等级震动
Protection grade vibration
其他颜色可订制 Other color can be customized
防护等级:
Protection grade:
产品认证:
Product certification:
标准 IP55 (双门) / IP55 (单门) CE
Standard IP54 (dual-swing door) / IP55 (single-swing door) CE
最高 IP56 (双门) / IP66 (单门)
Up to IP55 (dual-swing door) / IP66 (single-swing door)

高度 mm	1500	1500	1500	1500	1500	1500
Height mm	1500	1500	1500	1500	1500	1500
宽度 mm	600	600	600	800	800	800
Width mm	600	600	600	800	800	800
深度 mm	400	600	800	400	600	800
Depth mm	400	600	800	400	600	800

MIX 十五折模組柜 MIX 15-FOLD MODULE CABINET

安装板高度 mm Mounting plate height mm	1390	1390	1390	1390	1390	1390
安装板宽度 mm Mounting plate width mm	495	495	495	695	695	695
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX1506040	MIX1506060	MIX1506080	MIX1508040	MIX1508060	MIX1508080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	1	1	1	1	1	1
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装横梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	1	1	1	1	1	1

选购配件 Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装横梁 Mounting stringer with three rows of holes	■	■	■	■	■	■

MIX 十五折模組柜 MIX 15-FOLD MODULE CABINET

门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	1500	1500	1500	1500	1500	1500
宽度 mm Width mm	1000	1000	1000	1200	1200	1200
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1390	1390	1390	1390	1390	1390
安装板宽度 mm Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

型号 Model	MIX15010040	MIX15010060	MIX15010080	MIX15012040	MIX15012060	MIX15012080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	2	2	2	2	2	2
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	2	2	2	2	2	2

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	1600	1600	1600	1600	1600	1600
宽度 mm Width mm	600	600	600	800	800	800
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1490	1490	1490	1490	1490	1490
安装板宽度 mm Mounting plate width mm	495	495	495	695	695	695
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX1606040	MIX1606060	MIX1606080	MIX1608040	MIX1608060	MIX1608080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	1	1	1	1	1	1
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	1	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
开柜附件 Cabinet combination accessory	■	■	■	■	■	■

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

高度 mm Height mm	1600	1600	1600	1600	1600	1600
宽度 mm Width mm	1000	1000	1000	1200	1200	1200
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1490	1490	1490	1490	1490	1490
安装板宽度 mm Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX16010040	MIX16010060	MIX16010080	MIX16012040	MIX16012060	MIX16012080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	2	2	2	2	2	2
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	2	2	2	2	2	2

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

选购配件

Optional accessories

侧板	■	■	■	■	■	■
Side plate	■	■	■	■	■	■
三排孔安装横梁	■	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条	■	■	■	■	■	■
Door mounting strips	■	■	■	■	■	■
灯具	■	■	■	■	■	■
Lamp	■	■	■	■	■	■
门限位开关	■	■	■	■	■	■
Door limit switch	■	■	■	■	■	■
门制动器	■	■	■	■	■	■
Door brake	■	■	■	■	■	■
文件袋	■	■	■	■	■	■
File bag	■	■	■	■	■	■
电脑托盘	■	■	■	■	■	■
Computer tray	■	■	■	■	■	■
底座	■	■	■	■	■	■
Base	■	■	■	■	■	■
并柜附件	■	■	■	■	■	■
Cabinet combination accessory	■	■	■	■	■	■

高度 mm	1800	1800	1800	1800	1800	1800
Height mm	1800	1800	1800	1800	1800	1800
宽度 mm	600	600	600	800	800	800
Width mm	600	600	600	800	800	800
深度 mm	400	600	800	400	600	800
Depth mm	400	600	800	400	600	800
安装板高度 mm	1690	1690	1690	1690	1690	1690
Mounting plate height mm	1690	1690	1690	1690	1690	1690
安装板宽度 mm	495	495	495	695	695	695
Mounting plate width mm	495	495	495	695	695	695

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

Mounting plate width mm						
柜体材料厚度 mm	2.0	2.0	2.0	2.0	2.0	2.0
Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm	2.0	2.0	2.0	2.0	2.0	2.0
Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm	2.5	2.5	2.5	2.5	2.5	2.5
Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号	MIX1806040	MIX1806060	MIX1806080	MIX1808040	MIX1808060	MIX1808080
Model	MIX1806040	MIX1806060	MIX1806080	MIX1808040	MIX1808060	MIX1808080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门	1	1	1	1	1	1
Door	1	1	1	1	1	1
MS8023-1W 平面锁	1	1	1	1	1	1
MS8023-1W flat lock	1	1	1	1	1	1
安装横梁	2	2	2	2	2	2
Mounting stringer	2	2	2	2	2	2
进线活动板	3	3	3	3	3	3
Incoming movable plate	3	3	3	3	3	3
吊环	4	4	4	4	4	4
Lifting ring	4	4	4	4	4	4
接地线	1	1	1	1	1	1
Earthing wire	1	1	1	1	1	1

选购配件

Optional accessories

侧板	■	■	■	■	■	■
Side plate	■	■	■	■	■	■
三排孔安装横梁	■	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条	■	■	■	■	■	■
Door mounting strips	■	■	■	■	■	■

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	1800	1800	1800	1800	1800	1800
宽度 mm Width mm	1000	1000	1000	1200	1200	1200
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1690	1690	1690	1690	1690	1690
安装板宽度 mm Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5

箱、柜体系列

MIX 十五折模组机柜 MIX 15-FOLD MODULE CABINET

型号 Model	MIX18010040	MIX18010060	MIX18010080	MIX18012040	MIX18012060	MIX18012080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	2	2	2	2	2	2
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	2	2	2	2	2	2

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door position switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	2000	2000	2000	2000	2000	2000
宽度 mm Width mm	600	600	600	800	800	800
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1890	1890	1890	1890	1890	1890
安装板宽度 mm Mounting plate width mm	495	495	495	695	695	695
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX2006040	MIX2006060	MIX2006080	MIX2008040	MIX2008060	MIX2008080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	1	1	1	1	1	1
-----------	---	---	---	---	---	---

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

MS8025-1W 平面锁 MS8025-1W flat lock	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	1	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

高度 mm Height mm	2000	2000	2000	2000	2000	2000
宽度 mm Width mm	1000	1000	1000	1200	1200	1200
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1890	1890	1890	1890	1890	1890
安装板宽度 mm Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX20010040	MIX20010060	MIX20010080	MIX20012040	MIX20012060	MIX20012080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	2	2	2	2	2	2
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装横梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	2	2	2	2	2	2

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装横梁 Mounting stringer with three rows of holes		■	■	■	■	■
门安装条 Door mounting strips		■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	2100	2100	2100	2100	2100	2100
宽度 mm Width mm	600	600	600	800	800	800
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1990	1990	1990	1990	1990	1990
安装板宽度 mm Mounting plate width mm	495	495	495	695	695	695

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX2106040	MIX2106060	MIX2106080	MIX2108040	MIX2108060	MIX2108080
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	1	1	1	1	1	1
MS8023-1W 平面锁 MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	1	1	1	1	1	1

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■
文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	2100	2100	2100	2100	2100	2100
宽度 mm Width mm	1000	1000	1000	1200	1200	1200
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	1990	1990	1990	1990	1990	1990
安装板宽度 mm Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

型号 Model	MIX21010040	MIX21010060	MIX21010080	MIX21012040	MIX21012060	MIX21012080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	2	2	2	2	2	2
MS8023-1W 平面锁 MS8023-1W FLAT LOCK	1	1	1	1	1	1
安装纵梁 Mounting stringer	2	2	2	2	2	2
进线活动板 Incoming movable plate	3	3	3	3	3	3
吊环 Lifting ring	4	4	4	4	4	4
接地线 Earthing wire	2	2	2	2	2	2

选购配件

Optional accessories

侧板 Side plate	■	■	■	■	■	■
三排孔安装纵梁 Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条 Door mounting strips	■	■	■	■	■	■
灯具 Lamp	■	■	■	■	■	■
门限位开关 Door limit switch	■	■	■	■	■	■
门制动器 Door brake	■	■	■	■	■	■

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

文件袋 File bag	■	■	■	■	■	■
电脑托盘 Computer tray	■	■	■	■	■	■
底座 Base	■	■	■	■	■	■
并柜附件 Cabinet combination accessory	■	■	■	■	■	■

高度 mm Height mm	2200	2200	2200	2200	2200	2200
宽度 mm Width mm	600	600	600	800	800	800
深度 mm Depth mm	400	600	800	400	600	800
安装板高度 mm Mounting plate height mm	2090	2090	2090	2090	2090	2090
安装板宽度 mm Mounting plate width mm	495	495	495	695	695	695
柜体材料厚度 mm Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号 Model	MIX2206040	MIX2206060	MIX2206080	MIX2208040	MIX2208060	MIX2208080
防护等级 IP, 符合 IEC60529 标准 Protection grade IP, comply with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门 Door	1	1	1	1	1	1
-----------	---	---	---	---	---	---

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

MS8023-1W 平面锁	1	1	1	1	1	1
MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁	2	2	2	2	2	2
Mounting stringer	2	2	2	2	2	2
进线活动板	3	3	3	3	3	3
Incoming movable plate	3	3	3	3	3	3
吊环	4	4	4	4	4	4
Lifting ring	4	4	4	4	4	4
接地线	1	1	1	1	1	1
Earthing wire	1	1	1	1	1	1

选购配件

Optional accessories

侧板	■	■	■	■	■	■
Side plate	■	■	■	■	■	■
三排孔安装纵梁	■	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条	■	■	■	■	■	■
Door mounting strips	■	■	■	■	■	■
灯具	■	■	■	■	■	■
Lamp	■	■	■	■	■	■
门限位开关	■	■	■	■	■	■
Door limit switch	■	■	■	■	■	■
门制动器	■	■	■	■	■	■
Door brake	■	■	■	■	■	■
文件袋	■	■	■	■	■	■
File bag	■	■	■	■	■	■
电脑托盘	■	■	■	■	■	■
Computer tray	■	■	■	■	■	■
底座	■	■	■	■	■	■
Base	■	■	■	■	■	■
并柜附件	■	■	■	■	■	■
Cabinet combination accessory	■	■	■	■	■	■

箱、柜体系列

MIX 十五折模組机柜 MIX 15-FOLD MODULE CABINET

高度 mm	2200	2200	2200	2200	2200	2200
Height mm	2200	2200	2200	2200	2200	2200
宽度 mm	1000	1000	1000	1200	1200	1200
Width mm	1000	1000	1000	1200	1200	1200
深度 mm	400	600	800	400	600	800
Depth mm	400	600	800	400	600	800
安装板高度 mm	2090	2090	2090	2090	2090	2090
Mounting plate height mm	2090	2090	2090	2090	2090	2090
安装板宽度 mm	895	895	895	1095	1095	1095
Mounting plate width mm	895	895	895	1095	1095	1095
柜体材料厚度 mm	2.0	2.0	2.0	2.0	2.0	2.0
Cabinet material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
门板材料厚度 mm	2.0	2.0	2.0	2.0	2.0	2.0
Door panel material thickness mm	2.0	2.0	2.0	2.0	2.0	2.0
安装板厚度 mm	2.5	2.5	2.5	2.5	2.5	2.5
Mounting thickness mm	2.5	2.5	2.5	2.5	2.5	2.5
型号	MIX22010040	MIX22010060	MIX22010080	MIX22010240	MIX22010260	MIX22010280
Model	MIX22010040	MIX22010060	MIX22010080	MIX22010240	MIX22010260	MIX22010280
防护等级 IP 符合 IEC60529 标准 Protection grade IP complies with the IEC60529 standard	IP55	IP55	IP55	IP55	IP55	IP55

产品供货范围

Scope of supply of the product

门	2	2	2	2	2	2
Door	2	2	2	2	2	2
MS8023-1W 平面锁	1	1	1	1	1	1
MS8023-1W flat lock	1	1	1	1	1	1
安装纵梁	2	2	2	2	2	2
Mounting stringer	2	2	2	2	2	2
进线活动板	3	3	3	3	3	3
Incoming movable plate	3	3	3	3	3	3
吊环	4	4	4	4	4	4
Lifting ring	4	4	4	4	4	4
接地线	2	2	2	2	2	2
Earthing wire	2	2	2	2	2	2

选购配件

Optional accessories

侧板	■	■	■	■	■	■
Side plate	■	■	■	■	■	■
三排孔安装横梁	■	■	■	■	■	■
Mounting stringer with three rows of holes	■	■	■	■	■	■
门安装条	■	■	■	■	■	■
Door mounting strips	■	■	■	■	■	■
灯具	■	■	■	■	■	■
Lamp	■	■	■	■	■	■
门限位开关	■	■	■	■	■	■
Door limit switch	■	■	■	■	■	■
门制动器	■	■	■	■	■	■
Door brake	■	■	■	■	■	■
文件袋	■	■	■	■	■	■
File bag	■	■	■	■	■	■
电脑托盘	■	■	■	■	■	■
Computer tray	■	■	■	■	■	■
底座	■	■	■	■	■	■
Base	■	■	■	■	■	■
机柜附件	■	■	■	■	■	■
Cabinet combination accessory	■	■	■	■	■	■



D Q 箱 系 列

DQ-1

特点:

1. 前后开门, 方便安装板的装配和维修.
2. 上盖板装有液压支撑可以上掀60度, 方便面板上器件的装配和接线.
3. 安装板可以前后移动.
4. 底部设置进线盖板, 可以拆卸后开进线孔.

Features:

1. Front & Rear doors, easy for mounting plant assembly and maintenance
2. Top cover plate is equipped with hydraulic support can lift on 60°, easy for electric device assembly and wiring
3. Mounting plate could move forward & back
4. Cable inlet cover plate on the bottom; the cover plate can be dismantled to drill holes



材料: 箱体: 钢板 1.5mm

门板、面板: 钢板 2.0mm

表面处理: 磷化、喷涂粉末涂层,

颜色RAL7035或者RAL7032橘纹

2.5mm的镀锌安装板

防护等级: IP54

Material: Enclosure: Steel Plate 1.5mm

Door Plate & Panel: Steel Plate 2.0mm

Surface Treatment:

Phosphating, Spraying Powder Coating,

Color RAL7035 or RAL7032 with orange

peel 2.5mm Galvanized Mounting Plate


Protection Level: IP54



D Q 箱 系 列

DQ-1

DQ-1 细节图 Details

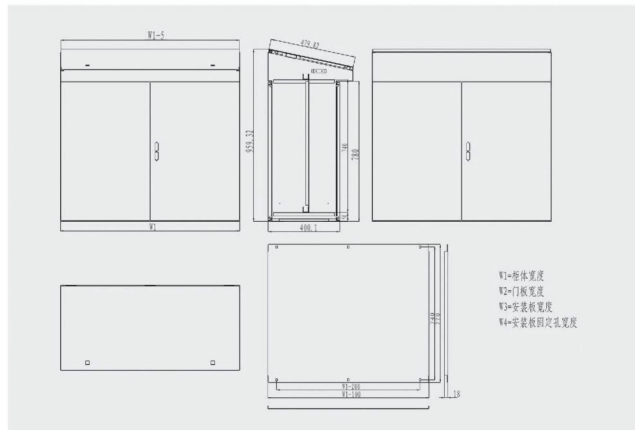

宽度 Width (mm)	数量 Quantity	600	800	1000	1200	1400	1500	页码 (Page)
高度 Height (mm)		960	960	960	960	960	960	
深度 Depth (mm)		400-480	400-480	400-480	400-480	400-480	400-480	
门数 Doors		前单后门 Single	前单后门 Double	前单后门 Double	前单后门 Double	前单后门 Double	前单后门 Double	
安装板 Mounting Plate		1个	1个	1个	1个	1个	1个	
盖板 Cover Plate		1个	1个	1个	1个	1个	1个	



DQ 箱系列


DQ-2

特点:

1. 前后开门,方便安装板的装配和维修
2. 盖板装有液压支撑可以掀开60度,方便面板上器件的装配和接线
3. 安装板可以前后移动
4. 底部设置进线盖板,可以拆卸后开进线孔

Features:

1. Front & Rear doors, easy for mounting plant assembly and maintenance
2. The cover plate is equipped with hydraulics support can lift on 60°, easy for electric device assembly and wiring
3. Mounting plate could move forward & back
4. Cable inlet cover plate on the bottom; the cover plate can be dismantled to drill holes

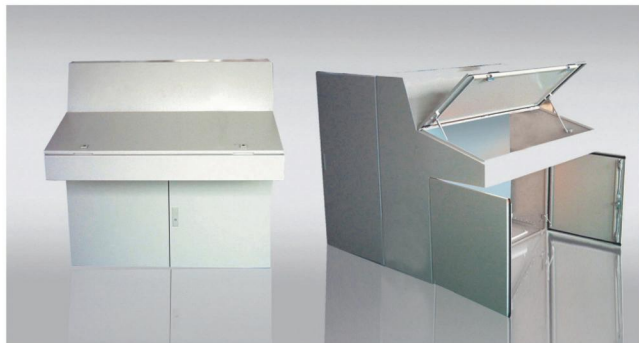

材料:箱体:钢板 1.5mm

门板:面板:钢板 2.0mm

 表面处理:磷化、喷涂粉末涂层,颜色RAL7035或者
RAL7032橘纹,2.5mm的镀锌安装板

防护等级:IP54

Material:Enclosure: Steel Plate 1.5mm

Door Plate & Panel: Steel Plate 2.0mm

Surface Treatment:

 Phosphating, Spraying Powder Coating,
Color RAL7035 or RAL7032 with orange peel
2.5mm Galvanized Mounting Plate

Protection Level: IP54



DQ 箱系列

DQ-2

DQ-2 细节图 Details



宽度Width(mm)	数量 Quantity	600	800	1000	1200
高度Height(mm)		1200	1200	1200	1200
深度Depth(mm)		500-1000	500-1000	500-1000	500-1000
门数 Doors		前后双门 Double	前后双门 Double	前后双门 Double	前后双门 Double
安装板 MountingPlate		1个	1个	1个	1个
盖板 CoverPlate		2个	2个	2个	2个

不锈钢小型箱体 Stainless Steel Small Box

产品特点 Feature

■ 为了满足制药、食品等卫生要求较高行业的需求,以及在高腐蚀环境下保证箱体的正常使用,东安还提供了相应的不锈钢箱体。

不锈钢箱体采用304以上牌号的拉丝不锈钢,采用独特的加工工艺,从而使得箱体的外观和品质更加出众。

■ Dongan provides stainless steel box for high level health demand industry like pharmacy & food industry, as well as high corrosive environment.

We use 304 wire drawing stainless steel with unique process technique to get outstanding look and quality.

- DK 采用不锈钢材质的箱盖螺钉,可以使得防护等级更高
DK series use stainless steel screws to get higher protection level.
- CB 箱的铰链可以使开门达到180度,操作空间更加便捷
Hinges of CB series could make door open to 180 which has more convenient operation space
- MB 独特的防水边设计可以保证开门时雨水不流入箱体
MB Unique waterproof edge prevent water into box
- 所有箱体的焊缝全部采用独特的焊接工艺,焊接以后不打磨,保证了不锈钢材质不受伤害以及外观的一致性
Unique welding technique applied on welding line guarantee material from harm and appearance consistency.
- 所有箱体在采用导电胶条后均可以满足EMC要求
After using conductive tape, all box could satisfy EMC demand.

不锈钢接线箱DK Stainless Steel Junction box DK



材料:

304不锈钢

箱体1.2mm 箱盖1.2mm

宽度或高度尺寸大于等于500mm时料厚为1.5mm

表面处理:

单面拉丝 320目

防护等级: IP54

标准配置:

箱体、盒盖四周带聚氨酯泡沫塑料密封圈以及包孔、盒盖挂件含塑料套管的箱盖螺钉、壁挂件

Material:

304 stainless steel

Enclosure 1.2mm, Door Plate 1.2mm,

When width or height ≥ 500 mm, it is 1.5mm


Surface Treatment:

single wire drawing, 320 meshes

Protection Level: IP54

Standard Configuration:

Box/polyester foam plastic seal cover screw with plastic sleeve hanging piece

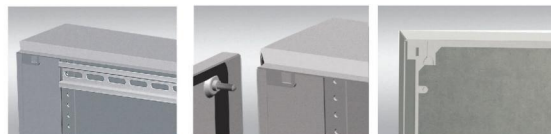

- ① 盖板用螺钉固定,可以迅速打开及可靠关闭,箱体折边设计简洁,提供更大的安装空间
- ② 底部支架为螺纹孔,能够在上下表面安装导轨,使箱体深度得到更好的使用
- ③ 底部可根据客户要求定制安装板,提供更灵活的安装空间
- ④ Cover Plate is fixed by thread screw for rapid open & reliable close. Simple design edgefold provides more installation space.
- ⑤ The bottom support has threaded hole, which could install slide way on top & bottomplate surface. It makes box depth get better use.
- ⑥ It could be custom made mounting plate on the bottom according to client demand. Provide more flexible installation space.

不锈钢接线箱DK Stainless Steel Junction box DK

上下无封板深度80 (mm) No plate on top & bottom, Depth 80mm

宽度 (Width) mm	数量 (Quantity)	150	200	200	300	300	400	600	页码 (Page)
高度 (Height) mm		150	150	200	150	200	200	200	
深度 (Depth) mm		80	80	80	80	80	80	80	

标配附件 Standardized Accessory

孔塞 Hole Plug	4个	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	
壁挂件 Hanging Piece	4个	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	

定制附件 Custom Made Accessory

安装板 Mounting Plate	1个	1340.118	1340.218	1340.228	1340.218	1340.328	1340.428	1340.428	
导轨 Sldy Way 35/7.5	1个	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	
导轨 Sldy Way 35/15	1个	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	

深度 120mm Depth 120mm

宽度 (Width) mm	数量	150	200	200	300	300	400	600	页码
高度 (Height) mm		150	150	200	150	200	200	300	
深度 (Depth) mm		120	120	120	120	120	120	120	
型号 (Model) DK	1个	1310.111	1310.210	1310.221	1310.311	1310.321	1310.421	1310.431	

定制附件 Standardized Accessory

安装板 Mounting Plate	1个	1340.111	1340.210	1340.221	1340.311	1340.321	1340.421	1340.431	
导轨 Sldy Way 35/7.5	1个	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	
导轨 Sldy Way 35/15	1个	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	

定制附件 Custom Made Accessory

孔塞 Hole Plug	4个	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	
壁挂件 Hanging Piece	4个	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	

宽度 (Width) mm	数量	500	500	600	600	600	800	页码
高度 (Height) mm		200	300	200	300	400	200	400
深度 (Depth) mm		120	120	120	120	120	120	120
型号 (Model) DK	1个	1310.521	1310.531	1310.621	1310.631	1310.641	1310.821	1310.841

定制附件 Standardized Accessory

安装板 Mounting Plate	1个	1340.521	1340.531	1340.621	1340.631	1340.641	1340.821	1340.841	
导轨 Sldy Way 35/7.5	1个	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	8560.000	
导轨 Sldy Way 35/15	1个	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	8561.000	


定制附件 Custom Made Accessory

孔塞 Hole Plug	4个	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	1162.800	
壁挂件 Hanging Piece	4个	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	1161.801	

外形尺寸可以按照要求定制,标准配置不变,颜色有特殊要求及需要定制附件时请在合同中注明。


Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

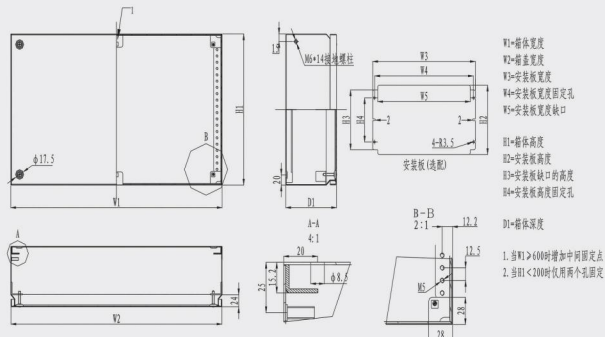

DK	宽度尺寸					高度尺寸			
	W1	W2	W3	W4	W5	H1	H2	H4	H5
150*150*80	150	149	135	116	103	150	125	123	80
200*150*80	200	199	185	166	153	150	125	123	80
200*200*80	200	199	185	166	153	200	175	173	75 80
300*150*80	300	299	285	266	253	150	125	123	80
300*200*80	300	299	285	266	253	200	175	173	75 80
400*200*80	400	399	385	366	353	200	175	173	75 80
400*200*120	400	399	385	366	353	200	175	173	75 80
150*150*80	150	149	135	116	103	150	125	123	80
150*150*120	150	149	135	116	103	150	125	123	120
200*150*120	200	199	185	166	153	150	125	123	120
200*200*120	200	199	185	166	153	200	175	173	75 120
300*150*120	300	299	285	266	253	150	125	123	120
300*200*120	300	299	285	266	253	200	175	173	75 120
400*200*120	400	399	385	366	353	200	175	173	75 120
400*300*120	400	399	385	366	353	300	275	273	175 120
500*200*120	500	499	485	466	453	200	175	173	75 120
500*300*120	500	499	485	466	453	300	275	273	175 120
600*200*120	600	599	585	566	553	200	175	173	75 120
600*300*120	600	599	585	566	553	300	275	273	175 120
600*400*120	600	599	585	566	553	400	375	373	275 120
800*200*120	800	799	785	766	753	200	175	173	75 120
800*400*120	800	799	785	766	753	400	375	373	275 120

不锈钢小型控制箱 CB Stainless Steel Small Control Box CB

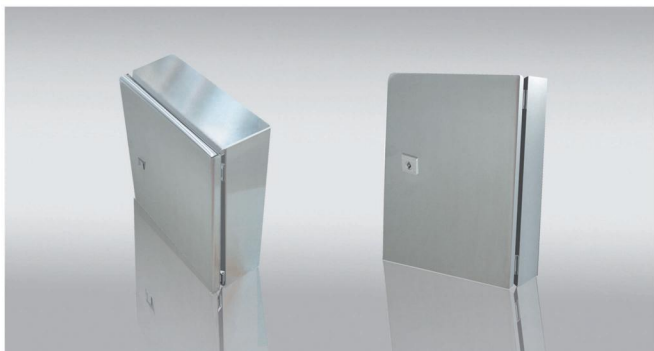

产品特点 Features

- 更加精巧的180°铰链可以使开门角度最大化,更加便于操作。
More elaborate 180° hinge makes open angle maximum, and makes operation more convenient.
- 在高度低于250mm的情况下仍然可以使用两个铰链,使门板更加稳固。
Two hinges are still available to use under 250mm height, it makes front plate more stable.
- 独特的防水边设计以及胶条处理可以使防护等级最高达到IP56。
Unique waterproof edgefold & sealing rubber strip make protection level to IP56.
- 提供安装板保证最大化的安装空间。
Provide mounting plate to maximize installation space.

材料:

304不锈钢
箱体1.2mm 门板1.2mm
宽度或高度尺寸≥500mm时箱体料厚为1.5mm,
门板为2.0mm
安装板镀锌 2.5mm

表面处理:

单面拉丝 320目
防护等级: IP54

标准配置:

箱体、门板四周带聚氨酯泡沫塑料密封圈,1把小方锁固定在门板左侧,镀锌安装板,背部配孔塞、壁挂件

Material:

304 stainless steel
Enclosure 1.2mm, Door Plate 1.2mm,
When width or height≥500mm, it is 1.5mm,
door plate is 2.0mm
Mounting Plate is galvanized 2.5mm

Surface Treatment:

single wire drawing, 320 meshes

Protection Level: IP54

Standard Configuration:

Box, polyester foam plastic sealcover screw with plastic sleeve one lock on the left of door galvanized mounting/hanging piece

宽度 Width mm	数量 Qty	150	200	150	200	200	300	500	页码
高度 Height mm		150	200	300	300	400	400	500	
深度 Depth mm		80	80	80	80	80	80	80	
安装板 Mounting Plate	1个								
型号 CB Model CB	1个								

附件

孔塞 Hole Plug	4个								
壁挂件 Hanging Piece	4个								
盖板扣盖 选配 Cable Cover/cover(optional)	1个								


宽度 Width mm	数量 Qty	150	200	150	200	200	300	500	页码
高度 Height mm		150	200	300	300	400	400	500	
深度 Depth mm		120	120	120	120	120	120	120	
安装板 Mounting Plate	1个								
型号 CB Model CB	1个								

附件

孔塞 Hole Plug	4个								
壁挂件 Hanging Piece	4个								
盖板扣盖 选配 Cable Cover/cover(optional)	1个								

外形尺寸可以按照要求定制,标准配置不变,颜色有特殊要求,底部加配凸台盖板及需要定制附件时请在合同中注明。
Overall dimension can be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

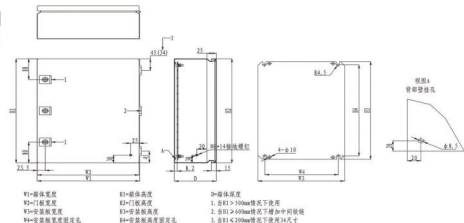

CB	宽度尺寸 Width				高度尺寸 Height				深度 Depth	
	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2
150*150*80	150	148	104	65	150	150	125	100	80	80
200*200*80	200	198	154	115	200	200	175	150	80	80
150*300*80	150	148	104	65	300	300	275	250	80	80
200*300*80	200	198	154	115	300	300	275	250	80	80
200*400*80	200	198	154	115	400	400	375	350	80	80
300*400*80	300	298	254	215	400	400	375	350	80	80
500*500*80	500	498	454	415	500	500	475	450	80	80
150*150*120	150	148	104	65	150	150	125	100	120	120
200*200*120	200	198	154	115	200	200	175	150	120	120
150*300*120	150	148	104	65	300	300	275	250	120	120
200*300*120	200	198	154	115	300	300	275	250	120	120
200*400*120	200	198	154	115	400	400	375	350	120	120
300*400*120	300	298	254	215	400	400	375	350	120	120
500*500*120	500	498	454	415	500	500	475	450	120	120

不锈钢紧凑型控制箱MB Stainless Steel Compact Control Box MB



材料:

304 不锈钢

箱体1.2mm 箱盖1.5mm

宽度或高度尺寸大于等于500mm时料厚为1.5mm

门板为2.0mm 安装板镀锌 2.5mm

表面处理:

单面拉丝 320目

防护等级: IP54

标准配置:

箱体、门板四周带聚氨酯泡沫塑料密封圈, 1把不锈钢小方锁固定在门板左侧, 镀锌安装板, 背部配孔塞, 壁挂件, 两根安装条

Material:

304 stainless steel

Enclosure 1.2mm, Door Plate 1.5mm,

When width or height ≥ 500 mm, it is 1.5mm, door plate is

2.0mm Mounting Plate is galvanized 2.5mm

Surface Treatment:

single wire drawing, 320 meshes

Protection Level: IP54

Standard Configuration:

Box polyester foam plastic seal cover screw with plastic sleeve one lock on the left of door galvanized mounting hole plug & hanging piece two mounting bars

宽度(Width) 200~600, 高度(Height) 300~500


宽度 Width(mm)	数量 Quantity	200	300	300	380	380	380	页码 page
高度 Height(mm)		300	300	400	300	300	380	
深度 Depth(mm)		155	210	210	155	210	210	
安装板 Mounting Plate	1个							
型号 Model MB	1个							

宽度 Width(mm)	数量 Quantity	400	300	400	500	500	600	600	页码 page
高度 Height(mm)		400	500	500	500	500	380	380	
深度 Depth(mm)		210	210	210	210	300	210	350	
安装板 Mounting Plate	1个								
型号 Model MB	1个								

附件 Accessory

孔塞 Hole Plug	4个								
壁挂件 Hanging Piece	4个								
电缆盖板 Cable Cover Plate	1个								
安装条 Mounting Bar	2根								

不锈钢紧凑型控制箱MB Stainless Steel Compact Control Box MB

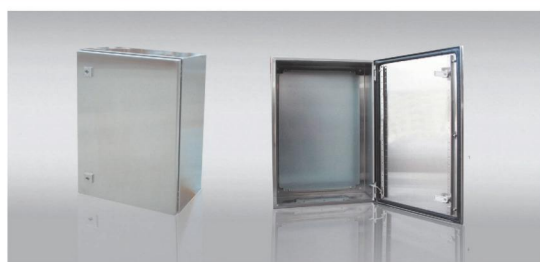

材料:

304 不锈钢

箱体1.2mm 箱盖1.5mm

宽度或高度尺寸大于等于500mm时料厚为1.5mm

表面处理:

单面拉丝 320目

防护等级: IP54

标准配置:

箱体、门板四周带聚氨酯泡沫塑料密封圈, 2把不锈钢小方锁固定在门板左侧, 镀锌安装板, 背部配孔塞, 壁挂件, 两根安装条

Material:

304 stainless steel

Enclosure 1.2mm, Door Plate 1.5mm,

When width or height ≥ 500 mm, it is 1.5mm, door plate is

2.0mm Mounting Plate is galvanized 2.5mm

Surface Treatment:

single wire drawing, 320 meshes

Protection Level: IP54

Standard Configuration:

Box polyester foam plastic seal cover screw with plastic sleeve two lock on the left of door galvanized mounting hole plug & hanging piece two mounting bars

宽度(Width) 380~760, 高度(Height) 500~800

宽度 Width(mm)	数量 Quantity	380	380	600	600			页码 page
高度 Height(mm)		600	600	600	600			
深度 Depth(mm)		210	350	210	350			
安装板 Mounting Plate	1个							
型号 Model MB	1个							

宽度 Width(mm)	数量 Quantity	600	600	600	760	760		页码 page
高度 Height(mm)		760	760	800	760	760		
深度 Depth(mm)		210	350	250	210	350		
安装板 Mounting Plate	1个							
型号 Model MB	1个							

附件 Accessory

孔塞 Hole Plug	4个							
壁挂件 Hanging Piece	4个							
电缆盖板 Cable Cover Plate	1个							
安装条 Mounting Bar	2根							

外形尺寸可以按照要求定制, 标准配置不变, 颜色有特殊要求, 底部加配凸台盖板及需要定制附件时请在合同中注明。
Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

不锈钢紧凑型控制箱MB Stainless Steel Compact Control Box MB

产品特点

东安的紧凑型控制箱在原有的基础上进行了诸多改进,从而使得其质量更好,价格更低,使用更方便。

- 区别于原有的生产方式使得质量和效率更高
- 提供了10多种模具生产的规格可供客户选择。

Feature


Dongan Compact Control Box makes great improvement based on former model, has better quality lower price and more convenient.

- New production mode makes better quality & efficiency.
- Over ten optional moulds to clients.


不锈钢紧凑型控制箱MB Stainless Steel Compact Control Box MB

- 1.经过多重折边的防水槽在开门时防止脏物和水的侵入,另外机械手焊接也保证拼缝处的焊接更加可靠美观
Multiple folds water proof edge prevent dirt & water invasion. Robot welding guarantee edge joint much more reliable & beautiful.
- 2.门板由模具一次成型,效率更高,外形更美观。
Door plate is mould shaped in one punch; get higher efficiency and better sharp.
- 3.背部预留壁挂孔用于壁挂件或直接安装在墙壁上。
Hanging hole on rear plate is reserve for hanging piece or direct hanging on wall.
- 4.底部电缆封板在底部凸台成型后加密封圈固定在箱体上。
After bottom cable inlet shaped, cable cover plate with seal ring on bottom is fixed on the box.
- 5.箱体上的接地螺钉提供了门板安的可靠接地
Grounding screw on the box guarantee reliable ground connection

细节图 Details

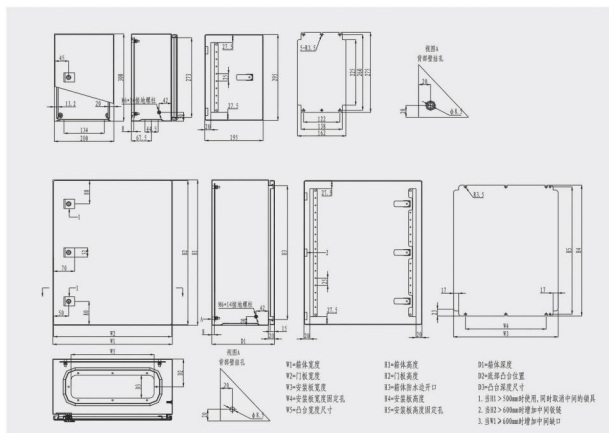

不锈钢紧装式控制箱 ME Stainless Steel Compact Control Box ME

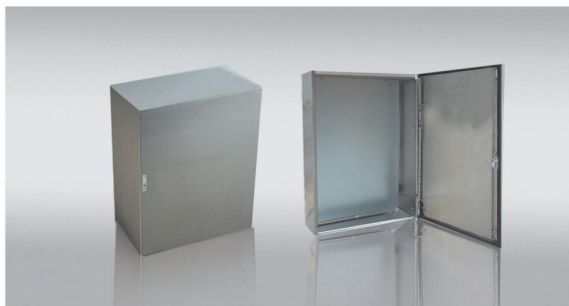

材料:

304不锈钢
 箱体1.2mm 门板1.5mm
 宽度或高度尺寸 ≥ 500 mm时箱体料厚为1.5mm,
 门板为2.0mm 安装板镀锌 2.5mm

表面处理:

单面拉丝 320目
 防护等级:IP54

标准配置:

箱体、门板四周带聚氨酯泡沫塑料密封圈,不锈钢
 平面铰链固定在门板左侧,镀锌安装板,背部配
 孔塞,壁挂件,两根安装条

Material:

304 stainless steel
 Enclosure 1.2mm, Door Plate 1.5mm,
 When width or height ≥ 500 mm, it is 1.5mm, door plate is 2.0mm
 Mounting Plate is galvanized 2.5mm

Surface Treatment:

single wire drawing, 320 meshes
 Protection Level: IP54

Standard Configuration:

Box/polyester foam plastic sealcover screw with plastic
 sleeve switch lock on the left of door/galvanized mounting
 hole plug & hanging piece two mounting bars

宽度 Width(mm)	数量 Quantity	1000	1000	1000	1200			页码 Page
高度 Height(mm)		1000	1200	1400	1400			
深度 Depth(mm)		300	300	300	300			
门数 Doors		双门 Double	双门 Double	双门 Double	双门 Double			
安装板 Mounting Plate	1个							
型号 Model ME	1个							


附件 Accessory

孔塞 Hole Plug	4个							
壁挂件 Hanging Piece	4个							
电缆盖板 Cable Cover Plate	1个							
安装条 Mounting Bar	2根							

外形尺寸也可以按照要求定制,标准配置不变.颜色有特殊要求时请在合同中注明.

Overall dimension could be custom made by requirement. Standard Configuration Please specify on the contract if any special color or custom made accessory request.

细节图 Details

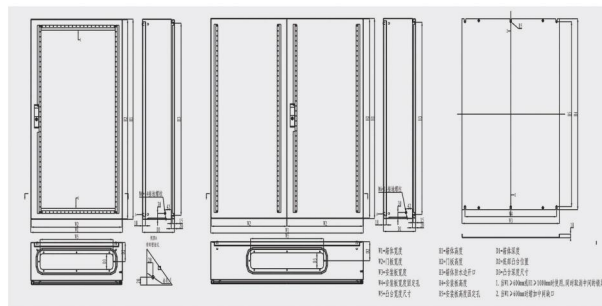

ME	宽度尺寸 Width					高度尺寸 Height					深度 Depth		
	W1	W2	W3	W4	W5	H1	H2	H3	H4	H5	D1	D2	D3
600*800*210	600	595	540	500	503	800	795	760	754	724	210	95	118
600*800*300	600	595	540	500	503	800	795	760	754	724	300	140	118
600*1000*300	600	595	540	500	503	1000	995	960	954	924	300	140	118
600*1200*300	600	595	540	500	503	1200	1195	1160	1154	1124	300	140	118
1000*760*210	1000	996	940	900	503	760	755	720	714	684	210	95	118
1000*760*300	1000	996	940	900	503	760	755	720	714	684	300	140	118
1000*1000*300	1000	996	940	900	503	1000	995	960	954	924	300	140	118
1000*1200*300	1000	996	940	900	503	1200	1195	1160	1154	1124	300	140	118
1000*1400*300	1000	996	940	900	503	1400	1395	1360	1354	1324	300	140	118
1200*1400*300	1200	1196	1140	1100	503	1400	1395	1360	1354	1324	300	140	118

Two views of a stainless steel safe. On the left, the safe is closed, showing its sleek, reflective exterior. On the right, the safe is open, revealing a heavy-duty interior with a locking mechanism and a handle on the inside of the door. The safe is set against a plain, light-colored background.

貼A4資料盒

[illegible]

This image shows two views of a stainless steel safe. On the left is a closed view of the safe, which is tall and rectangular with a brushed metal finish. On the right is an open view of the same safe, revealing its interior. The interior has a frosted glass door and a heavy-duty locking mechanism. A circular inset in the bottom right corner provides a close-up of the locking mechanism, showing a combination dial and a handle.

81


小柜体附件系列 Small box accessory Series

■ DS安装板 DS mounting plate

说明:适用于DS、MS柜体,可以单独购买
Feature: for DS, MS enclosure, available individually
材料: 2.5mm钢板
Material: 2.5mm steel plate
表面处理: 热镀锌
Surface Treatment: Galvanized

■ MB安装板 MB mounting plate

说明:适用于MB箱体,可以单独购买
Feature: for MB enclosure, available individually
材料: 2.5mm钢板
Material: 2.5mm steel plate
表面处理: 热镀锌
Surface Treatment: Galvanized



- 1.配合安装板下滑块使用,使安装板安装更省力更方便,无需螺丝固定。
- 2.模数化孔安装设计,可按模数化孔任意调节安装板的前后安装位置。
- 3.安装板下滑块采用尼龙材料制作,具有强度高,抗老化及减震效果。
- 1. Matching with fixing block under installation plate, makes installation of installation plate more energy saving and convenient, need no screw fixation.
- 2. Modular hole installation design, modular hole can be adjusted randomly for installation position to and fro.
- 3. Sliding block under installation plate adopts nylon material. It is high in strength, anti-aging and damping effect.

小柜体附件系列 Small box accessory Series

■ MB壁挂件1 MB Hanging Piece1

说明:适用于MB、ME柜体,有限位结构,可以横向或者竖向适用
Feature: for MB, ME enclosure, limited structure, applicable on horizontal or vertical
材料: 2.0钢板
Material: 2.0mm steel plate
表面处理: 冷镀锌
Surface Treatment: Cold galvanized

■ MB壁挂件2 MB Hanging Piece2

说明:适用于MB、ME柜体,承载能力强,可以在重载荷条件下适用
Feature: for MB, ME enclosure, limited structure, applicable on horizontal or vertical
材料: 3.0钢板
Material: 3.0mm steel plate
表面处理: 冷镀锌
Surface Treatment: Cold galvanized

■ MB标准壁挂件 MB Standard Hanging

说明:适用于MB、ME柜体
Feature: for MB enclosure, available individually
材料: 1.5钢板
Material: 1.5mm steel plate
表面处理: 冷镀锌
Surface Treatment: Galvanized

■ 变压器安装梁 Transformer Mounting Beam

说明:适用于DS、MS柜体内变压器的安装,一般为柜体底部适用
Feature: for transformer installation inside of DS, MS enclosure, usually applicable on the bottom
材料: 3.0钢板
Material: 3.0mm steel plate
表面处理: 热镀锌
Surface Treatment: Hot galvanized



■ 两排孔纵梁 Two-Parallel Beam

说明: 适用于MS, DS, 可以在柜体侧面安装
Feature: for MS, DS enclosure, could mounted on the flank



■ 一体化灯具 Integrated lamp

说明: 适用于MS, DS柜体, 在柜体顶部横向安装, 防护等级IP20
Feature: for MS, DS enclosure, transversely mounted on the top IP20



■ 标准灯具 Standard lamp

说明: 适用于MB, ME, MS, DS柜体, 在柜体顶部横向安装, 功率: 8W或者14W
Feature: for MB, ME, MS, DS enclosure, transversely mounted on the top, 8W or 14W



■ 开关 Switch

说明: 可以同时控制灯及风机, 可以单独购买
Feature: Simultaneous control lamp & fan, available purchase separately



■ 圆锁(戴乐克锁) Drum Lock (DIRAK Lock)

说明: 适用于MB柜体, 防护等级IP66
Feature: for MB enclosure, protection level 66
表面处理: 镀铬或发黑
Surface Treatment: Chrome or black



■ 搭扣锁 Hasp lock

说明: 适用于MB柜体, 可以侧面锁紧门板, 附带钥匙
Feature: for MB enclosure, could lock door from side, with key
表面处理: 镀铬或发黑
Surface Treatment: Chrome or black



■ 搭扣 Hasp

说明: 适用于MB柜体, 可以侧面锁紧门板
Feature: for MB enclosure, could lock door from side



■ 生久防雨锁 Waterproof Lock

说明: 适用于ME, MS, DS柜体, 防护等级IP55
颜色: 黑色, RAL7032
Feature: for ME, MS, DS enclosure, IP55
Color: Black, RAL7032





■ 小方锁 Small Square Lock

说明: 适用于MB, 防护等级IP55
颜色: RAL7032, RAL7035
Feature: for MB enclosure, IP55
Color: RAL7032, RAL7035



■ 705锁 705 Lock

说明: 适用于MB箱体
Feature: for MB box





■ 100、200高活动底座 100、200High moving Base

说明:底部4面可拆卸,上下可以走线,适用DS,MS,ME

Introduction: plate on bottom is detachable, applicable for DS,MS,ME

材料:支架2.5mm厚钢板,其余2.0mm厚钢板 Material: bracket is 2.5mm steel plate, others are 2.0mm
表面处理:喷涂黑色 Surface treatment: black painting



■ 100高固定底座 100 High Fixed Base

说明:底部4面封闭,上下可以走线,侧面前后可以根据要求开走线孔,适用DS,MS,DQ.

Introduction: all closed bottom, top & bottom wiring, wiring-hole on slide plate upon request, for DS, MS, DQ.

材料: 2.0mm厚钢板
Material: 2.0mm steel plate

表面处理:喷涂黑色
Surface Treatment: black spray coating

■ 200高大底座 200mm big base



1.45°45方管焊接,强度足够保证,配之我公司标准九折型材,安装方式灵活多变.

2.底座丝绵盖板,巧妙挂钩设计,每个盖板只需要两个螺丝固定,拆卸方便.

3.四面盖板可全部拆卸,使并柜之间安装电缆方便,特别是安装绕度较大的铠装电缆,操作方便,省时省力.

1.45°45 square pipe weld,ensure enough strength,together with standard nine fold section from our company,making installation methods more flexible.

2.Four side cover around base,skillful hook design,each cover plate needs only two screw fixation,convenience to disassemble

3.Four side cover can be dismantled,making cable laying between combined cabinet convenient,especially the installation of more flexible shielded cable.Operation on simple,time saving and labor-saving.



■ 活动托盘 Platform

说明:打开后可以摆放笔记本等调试设备,适用DS,MS
Instruction: for debugging device such as notebook, applicable for DS,MS

材料:2.0mm钢板 Material: 2.0mm steel plate

表面处理:喷涂
Surface treatment: spray coating



■ 防雨顶 Rain-proof Top

说明:箱体在户外时使用,适合MB,ME

Instruction: Applicable for MB, ME using outdoors

材料:1.5mm钢板

Material: 1.5mm steel plate

表面处理:喷涂

Surface Treatment: Spray Coating



■ 导轨支架

Guide Bracket

说明:适合安装端子导轨

Instruction: applicable for terminal guide installation

表面处理:蓝白锌

Surface treatment: blue-white zinc plating



■ 门限位件 Door Limit Part

说明:适用于DS,MS柜体,可以单独购买


Instruction: Applicable for DS, MS, available purchase individually

材料:2.5mm钢板

Material: 2.5 steel plate

表面处理:蓝白锌

Surface Treatment:blue-white zinc plating



■ 并柜吊装连接件 Lifting Connector

说明:适合DS并柜时顶部起吊,客户要求增加时提供


Instruction: applicable for DS cabinet combination lifting, provide if client request

材料:4mm钢板

Material: 2.0mm steel plate

表面处理:蓝白锌

Surface treatment: blue-white zinc plating



■ 平板并柜件 Flat Connector

说明:适合DS并柜,客户要求增加时提供

Instruction: Applicable for DS combination, available if customer request

材料:2.5mm钢板

Material: 2.5 mm steel plate

表面处理:蓝白锌

Surface treatment: blue-white zinc plating



■ L型并柜件 L sharp connector

说明:适合DS并柜,并柜标准配置

Instruction: Applicable for DS combination, standard combined-cabinet configuration

材料:2.5mm钢板

Material: 2.5mm steel plate

表面处理:蓝白锌

Surface treatment: blue-white zinc plating



■ 六角钢并柜件 Hexagon steel connector

说明:适合DS并柜,并柜标准配置

Instruction: Applicable for DS combination, standard combined-cabinet configuration

材料:六角钢

Material: hexagon steel

表面处理:蓝白锌

Surface treatment: blue-white zinc plating



■ 凸台封板 Boss Cover


说明:适用于MB, ME柜体,可以单独购买

Instruction: Applicable for MB, ME, available purchase individually


材料:1.2mm, 1.5mm厚钢板

Material: 1.2mm, 1.5mm steel plate


表面处理:喷涂 Surface Treatment: Spray Coating

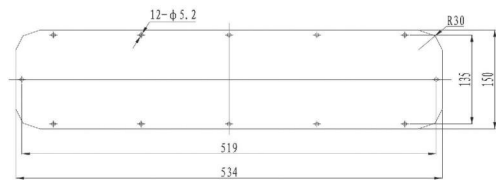


1号凸台封板

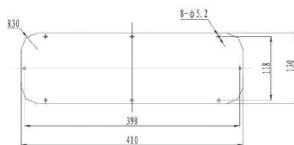


2号凸台封板



4号凸台封板

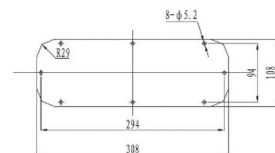

3号凸台封板



5号凸台封板



通风过滤网特性及型号规格

建议使用温度：S：-10℃~85℃ABS树脂材质，难燃及抗紫外线；

建议使用温度：S：-10℃~85℃滤网材质选用进口之尼龙纤维合成树脂，除尘滤高达AF80%；

(AFI=JAPAN AIR FILTER INSTITUTE)

建议使用温度：S：-10℃~85℃通风口部采用45度角长，创新设计，美观大方；

建议使用温度：S：-10℃~85℃防水防尘的多功能设计；

建议使用温度：S：-10℃~85℃确保控制器及精密电子零件之有效散热，延长使用寿命；

建议使用温度：S：-10℃~85℃降低故障率，防止误动作之产生。

Ventilation filter element characteristics and type, specification

Recommended application temperature: S: -10℃~85℃ ABS resin, difficult to combust and ultraviolet ray resistant;

Recommended application temperature: S: -10℃~85℃ filter element materials select imported nylon fiber synthetic resin, dust

removing rate up to AF 80%;

Recommended application temperature: S: -10℃~85℃ vent adopts 45 angle, innovative design, it is elegant;

Recommended application temperature: S: -10℃~85℃ multi-function design of waterproof and dust proof;

Recommended application temperature: S: -10℃~85℃ ensure controller and precise electric part heat disperse effectively, extension service life;

Recommended application temperature: S: -10℃~85℃, lower failure rate, prevent fault action

序号 no	规格型号 model	外型尺寸 (露出部分) The outer part (the bare part)	有效风量 efficient blast volume	除尘率 collection coefficient	防护等级 level of protection	适用风机 applicable blower fan	防雨罩 rain screen
01	FU-9801A	φ 105mm x 6mm	8.00m ³ /min	80%	IP44	SJ8025	可选
02	FU-9802A	φ 120mm x 6mm	12.0m ³ /min	80%	IP44	SJ9225	可选
03	FU-9803A	148.5mm x 148.5mm x 13.5mm	25.0m ³ /min	80%	IP44	SJ1238	无
04	FU-9804A	204mm x 204mm x 13.5mm	50.0m ³ /min	86%	IP44	SJ1238, SJ1725	无
05	FU-9805A	255mm x 255mm x 13.5mm	80.0m ³ /min	86%	IP44	SJ1725, SJ2206, SJ2072	无
06	FU-9806A	320mm x 320mm x 13.5mm	120m ³ /min	86%	IP44	SJ1725, SJ2072, SJ2506	无

风机参考数据及规格型号

外框材料：铝合金（压铸）

扇页材料：纤维塑料（UL94V-0）

轴 承：合金钢球珠

绝缘等级：在端子与外框内施以500V DC电压，

测得100兆欧绝缘值

耐电压等级：在端子与外框内施以1500V AC电压1秒，

无异常现象

使用寿命：S30000小时（20℃，一般湿度，实验室数据）

B60000小时（20℃，一般湿度，实验室数据）

建议使用温度：S：-10℃~85℃

B：-20℃~85℃

建议保存温度：S：-30℃~140℃

安全认证：UL、CUL、CSA、TUV、CE等认证

防护等级：IP34

Fan reference data and specification, type & model

Externa frame material: aluminum alloy "die-casting"

Sector material: fiber plastic (UL94 v-0)

Bearings: alloy copper and ball

Insulation class: apply 500 VDC to terminal and external frame and

measure 100 MQ insulation

Voltage withstand: apply 500 VDC to terminal and external frame for

second, without any abnormal

phenomenon.

Service life: S: 30000 h (20℃, normal humidity, laboratory data)

B: 60000 h (20℃, normal humidity, laboratory data)

Recommended application temperature: S: -10℃~85℃

B: -20℃~85℃


Recommended storage temperature: S: -30℃~140℃

Safety attestation: passes UL, CUL, CSA, TUV, CE attestation







Protection grade: IP34

序号 no	规格型号 model	外型尺寸 The external dimension	轴林 bearing	电压 pressure	频率 frequency	电流 current	功率 power	转速 rotate speed	风量 blast volume
01	SJ8025HA2	80*80*25mm	Sleeve/Ball	220/240	50/60	0.04/0.05	6.0/8.0	2000/2400	16/20
02	SJ9225HA2	92*92*25mm	Sleeve/Ball	220/240	50/60	0.03/0.04	6.0/8.0	2000/2400	25/34
03	SJ1238HA2	120*120*38mm	Sleeve/Ball	220/240	50/60	0.12/0.14	20/24	2700/3100	84/100
04	SJ1725HA2	172*150*51mm	Sleeve/Ball	220/240	50/60	0.28/0.35	44/51	2800/3100	190/220
05	SJ2072HA2	208*208*72mm	Ball	220/240	50/60	0.45/0.42	99/100.8	3000	546
06	SJ2206HA2	φ 220*60mm	Ball	220/240	50/60	0.32	42	2400	360
07	SJ2509HA2	φ 250*90mm	Ball	220/240	50/60	0.16/0.22	40/52	1600/1700	480/550

◆ 资质证书 Qualification certificate





◆ 资质证书 Qualification certificate



◆ 资质证书 Qualification certificate



◆ 资质证书 Qualification certificate

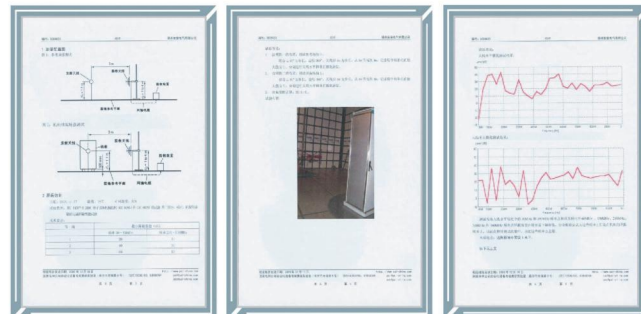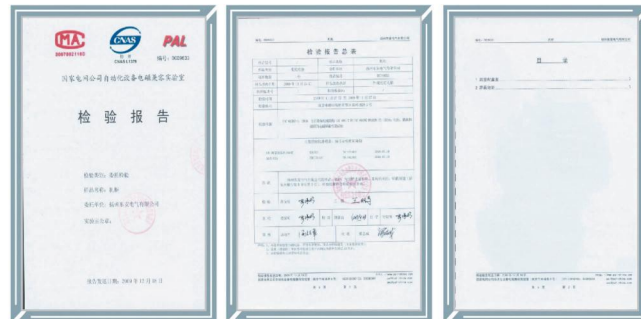

◆ 资质证书 Qualification certificate



◆ 资质证书 Qualification certificate



资质证书 Qualification certificate

Certification No. CPC2009031336

CPC
Certification & Testing

VERIFICATION OF LVD COMPLIANCE
With EU Low Voltage Directive 2006/95/EC

Certificate Holder : Shanghai XingYuan DongAn Electric Co., Ltd.

Address : Room 1203, No. 800, DongFang Road, Pudong District, Shanghai China

Manufacturer : Yangzhou DongAn Electric Co., Ltd.

Address : East side Jiangyin industry park, yangzhou city, Jiangsu China

Product Description : Frequency Conversion Water Supply BOX

Type and Model : BWVS-Series (0.75kw, 3.7kw, 7.5kw, 11kw, 15kw, 18.5kw, 22kw, 30kw, 40kw, 55kw)-3/0

Technical Construction File Referenced No./Rev. : DA-096282-LVD

Applicable Standard : EN60204-1:1997

Date Of Issuance : May 15, 2009

Conclusion of Assessment :
We hereby Confirm That The Technical Construction File And Manufacturing, Inspection And Testing Processes For Above Mentioned Equipment Comply With The Essential Safety Requirements Of EU Low Voltage Directive 2006/95/EC & Applied Codes And Standards.

Remarks: This Certificate is Only Valid For The Equipment And Configuration Described, And In Conjunction With The Test Data Detailed Above.

Authorized Signatory:
Name: *David Smith*
Position: Operations Manager

CE

CE MARKED PRODUCT CERTIFICATION TESTING CO. LTD
DEPT 318, 14th FLOOR, 1 STREET, LONDON W1W 7PU

220946033

资质证书 Qualification certificate

资质证书 Qualification certificate

SGS

Verification Report 验证报告 No. SGT03088 CHN Date: Jun 15, 2007 Page 1 of 15

Applicant: Shanghai XingYuan Dong An Electric Co., Ltd.
中国东安电气有限公司
Address: Room 1203, No. 800 DongFang Road, Pudong District, Shanghai, China
地址: 上海市浦东新区东方路800号1203室

Sample Name 样品名称	Control 控制
SGS Ref SGS 样品号	1046702 1046702
Manufacturer (if any) 制造商(如有)	DS DS

**Verification Period
验证日期** From: 2007.5.23 To: 2007.6.15

**Verification Requested
验证要求** With reference to Part C of the 2006/95/EC, and its associated documents, EN 60204-1:1997 and EN 60204-2:1997.

**Verification Method
验证方法** 1. Review was performed for the samples. Reported from the submitted articles and the related test reports according to the requirement.
2. Tests were performed for the samples indicated by the photos in the report with test methods reference to the EN 60204-1:1997 and EN 60204-2:1997.
3. The implementation of parts of the Reported Substances in Electromechanical Products.
(1) Following by test requirements:
(2) With reference to test methods:
(3) Determination of test results by CP and ANS.
(4) Determination of test results by CP and ANS.
(5) Determination of test results by CP and ANS.
(6) Determination of test results by CP and ANS.
(7) Determination of test results by CP and ANS.
(8) Determination of test results by CP and ANS.
(9) Determination of test results by CP and ANS.
(10) Determination of test results by CP and ANS.
(11) Determination of test results by CP and ANS.
(12) Determination of test results by CP and ANS.
(13) Determination of test results by CP and ANS.
(14) Determination of test results by CP and ANS.
(15) Determination of test results by CP and ANS.
(16) Determination of test results by CP and ANS.
(17) Determination of test results by CP and ANS.
(18) Determination of test results by CP and ANS.
(19) Determination of test results by CP and ANS.
(20) Determination of test results by CP and ANS.
(21) Determination of test results by CP and ANS.
(22) Determination of test results by CP and ANS.
(23) Determination of test results by CP and ANS.
(24) Determination of test results by CP and ANS.
(25) Determination of test results by CP and ANS.
(26) Determination of test results by CP and ANS.
(27) Determination of test results by CP and ANS.
(28) Determination of test results by CP and ANS.
(29) Determination of test results by CP and ANS.
(30) Determination of test results by CP and ANS.
(31) Determination of test results by CP and ANS.
(32) Determination of test results by CP and ANS.
(33) Determination of test results by CP and ANS.
(34) Determination of test results by CP and ANS.
(35) Determination of test results by CP and ANS.
(36) Determination of test results by CP and ANS.
(37) Determination of test results by CP and ANS.
(38) Determination of test results by CP and ANS.
(39) Determination of test results by CP and ANS.
(40) Determination of test results by CP and ANS.
(41) Determination of test results by CP and ANS.
(42) Determination of test results by CP and ANS.
(43) Determination of test results by CP and ANS.
(44) Determination of test results by CP and ANS.
(45) Determination of test results by CP and ANS.
(46) Determination of test results by CP and ANS.
(47) Determination of test results by CP and ANS.
(48) Determination of test results by CP and ANS.
(49) Determination of test results by CP and ANS.
(50) Determination of test results by CP and ANS.
(51) Determination of test results by CP and ANS.
(52) Determination of test results by CP and ANS.
(53) Determination of test results by CP and ANS.
(54) Determination of test results by CP and ANS.
(55) Determination of test results by CP and ANS.
(56) Determination of test results by CP and ANS.
(57) Determination of test results by CP and ANS.
(58) Determination of test results by CP and ANS.
(59) Determination of test results by CP and ANS.
(60) Determination of test results by CP and ANS.
(61) Determination of test results by CP and ANS.
(62) Determination of test results by CP and ANS.
(63) Determination of test results by CP and ANS.
(64) Determination of test results by CP and ANS.
(65) Determination of test results by CP and ANS.
(66) Determination of test results by CP and ANS.
(67) Determination of test results by CP and ANS.
(68) Determination of test results by CP and ANS.
(69) Determination of test results by CP and ANS.
(70) Determination of test results by CP and ANS.
(71) Determination of test results by CP and ANS.
(72) Determination of test results by CP and ANS.
(73) Determination of test results by CP and ANS.
(74) Determination of test results by CP and ANS.
(75) Determination of test results by CP and ANS.
(76) Determination of test results by CP and ANS.
(77) Determination of test results by CP and ANS.
(78) Determination of test results by CP and ANS.
(79) Determination of test results by CP and ANS.
(80) Determination of test results by CP and ANS.
(81) Determination of test results by CP and ANS.
(82) Determination of test results by CP and ANS.
(83) Determination of test results by CP and ANS.
(84) Determination of test results by CP and ANS.
(85) Determination of test results by CP and ANS.
(86) Determination of test results by CP and ANS.
(87) Determination of test results by CP and ANS.
(88) Determination of test results by CP and ANS.
(89) Determination of test results by CP and ANS.
(90) Determination of test results by CP and ANS.
(91) Determination of test results by CP and ANS.
(92) Determination of test results by CP and ANS.
(93) Determination of test results by CP and ANS.
(94) Determination of test results by CP and ANS.
(95) Determination of test results by CP and ANS.
(96) Determination of test results by CP and ANS.
(97) Determination of test results by CP and ANS.
(98) Determination of test results by CP and ANS.
(99) Determination of test results by CP and ANS.
(100) Determination of test results by CP and ANS.

**Verification Conclusion
验证结论** Based on the review of personal history and verification results of the submitted samples, the manufacturer with Part C of the 2006/95/EC, and its associated documents, EN 60204-1:1997 and EN 60204-2:1997, and the implementation of parts of the Reported Substances in Electromechanical Products, the manufacturer is in compliance with the requirements of the 2006/95/EC, and its associated documents, EN 60204-1:1997 and EN 60204-2:1997.

SGS 152727

SGS

Verification Report 验证报告 No. SGT03088 CHN Date: Jun 15, 2007 Page 2 of 15

Note: The test results are valid only in the tested items. The report shall not be used for other items or for other purposes. The report shall not be used for other items or for other purposes. The report shall not be used for other items or for other purposes.

SGS 152728



资质证书 Qualification certificate



资质证书 Qualification certificate



IP 防护等级标准

IP防护类别是用2个数字标记的 P protection category stands for 2 number mark			
例如一个防护类别		IP	4 4
code figure 标记字母			
The first marking number 第1个标记数字			
The second marking number 第2个标记数字			
接触保护和外来物保护等级 Contact protection and foreign object protection class		防水保护等级 Waterproof protection class	
The first marking number 第1个标记数字		The second number 第2个数字	
第1个标记数字	防护范围	第2个标记数字	防护范围
名称	说明 description	名称	说明 description
0	无防护 Non Protected	0	无防护 Non Protected
1	防护50mm直径和更大的外来物体 Protect the foreign object of diameter 50 mm and above	1	水滴防护 Water drop protection
2	防护12.5mm直径和更大的外来物体 Protect the foreign object of diameter 12.5 mm and above	2	箱体倾斜15°时, 防水滴。 Water drops are protected when cabinet tilts 15°
3	防护2.5mm直径和更大的外来物体 Protect the foreign object of diameter 2.5 mm and above	3	防护溅出的水 Protected against spray water
4	防护1.0mm直径和更大的外来物体 Protect the foreign object of diameter 1.0 mm and above	4	防护喷水 water spray protection
5	防护灰尘 Dust protection	5	防护射水 water injection protection
6	防尘密封 Dust sealing	6	防护强射水 Powerful water jetting protection
		7	防护短时间浸入水中 Protection of short-term immersion in water
		8	防护长期浸入水中 Protection of long-term immersion in water

东安与世界同步.....

Dong'an keeps pace with the world.....

